

12/12/97

Jc526 U.S. PTO

Please type a plus sign (+) inside this box → ☐PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	TRD 009 PA	Total Pages	
	First Named Inventor or Application Identifier			
	Arturo J. Garcia			
	Express Mail Label No.	EH374394643US		

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231				
<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (Submit an original, and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification [Total Pages 31] (preferred arrangement set forth below)</p> <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets 7]</p> <p>4. Oath or Declaration [Total Pages 2]</p> <ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy) (fax copy)b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below]i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b). <p>5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p> <p>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</p> <p>7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)</p> <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies					
ACCOMPANYING APPLICATION PARTS					
<p>8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</p> <p>9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <input type="checkbox"/> Power of Attorney (when there is an assignee)</p> <p>10. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations</p> <p>12. <input type="checkbox"/> Preliminary Amendment</p> <p>13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)</p> <p>14. <input checked="" type="checkbox"/> Small Entity <input type="checkbox"/> Statement filed in prior application, Statement(s) Status still proper and desired</p> <p>15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</p> <p>16. <input checked="" type="checkbox"/> Other: Check in the amount of \$ 428.00</p>					
<p>17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:</p> <p><input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No: _____</p>					
18. CORRESPONDENCE ADDRESS					
<p><input type="checkbox"/> Customer Number or Bar Code Label <input type="checkbox"/> Correspondence address below</p> <p>(Insert Customer No. or Attach bar code label here)</p>					
NAME	Robert L. Showalter				
ADDRESS	Killworth, Gottman, Hagan & Schaeff, L.L.P.				
	One Dayton Centre, Suite 500				
	One South Main St.				
CITY	Dayton	STATE	OH	ZIP CODE	45402-2023
COUNTRY	USA	TELEPHONE	937/ 223-2050	FAX	937/ 223-0724

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

<h2 style="margin: 0;">FEE TRANSMITTAL</h2> <p style="font-size: small; margin: 5px 0;">Note: Effective October 1, 1997. Patent fees are subject to annual revision.</p>	Complete if Known
TOTAL AMOUNT OF PAYMENT (\$518.00)	Application Number _____
	Filing Date _____
	First Named Inventor Arturo J. Garcia
	Group Art Unit _____
	Examiner Name _____
Attorney Docket Number TRD 009 PA	

METHOD OF PAYMENT (check one)	FEE CALCULATION (continued)																																																																																																																							
<p>1. <input type="checkbox"/> The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:</p> <p>Deposit Account Number _____</p> <p>Deposit Account Name _____</p> <p><input type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17 <input type="checkbox"/> Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance</p> <p>2. <input checked="" type="checkbox"/> Payment Enclosed:</p> <p style="margin-left: 20px;"><input checked="" type="checkbox"/> Check <input type="checkbox"/> Money Order <input type="checkbox"/> Other</p>	<h3>3. ADDITIONAL FEES</h3> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Large Entity Fee Code (\$)</th> <th>Small Entity Fee Code (\$)</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr><td>105 130</td><td>205 65</td><td>Surcharge - late filing fee or oath</td><td></td></tr> <tr><td>127 50</td><td>227 25</td><td>Surcharge - late provisional filing fee or cover sheet.</td><td></td></tr> <tr><td>139 130</td><td>139 130</td><td>Non-English specification</td><td></td></tr> <tr><td>147 2,520</td><td>147 2,520</td><td>For filing a request for reexamination</td><td></td></tr> <tr><td>112 920*</td><td>112 920*</td><td>Requesting publication of SIR prior to Examiner action</td><td></td></tr> <tr><td>113 1,840*</td><td>113 1,840*</td><td>Requesting publication of SIR after Examiner action</td><td></td></tr> <tr><td>115 110</td><td>215 55</td><td>Extension for reply within first month</td><td></td></tr> <tr><td>116 400</td><td>216 200</td><td>Extension for reply within second month</td><td></td></tr> <tr><td>117 950</td><td>217 475</td><td>Extension for reply within third month</td><td></td></tr> <tr><td>118 1,510</td><td>218 755</td><td>Extension for reply within fourth month</td><td></td></tr> <tr><td>128 2,060</td><td>228 1,030</td><td>Extension for reply within fifth month</td><td></td></tr> <tr><td>119 310</td><td>219 155</td><td>Notice of Appeal</td><td></td></tr> <tr><td>120 310</td><td>220 155</td><td>Filing a brief in support of an appeal</td><td></td></tr> <tr><td>121 270</td><td>221 135</td><td>Request for oral hearing</td><td></td></tr> <tr><td>138 1,510</td><td>138 1,510</td><td>Petition to institute a public use proceeding</td><td></td></tr> <tr><td>140 110</td><td>240 55</td><td>Petition to revive - unavoidable</td><td></td></tr> <tr><td>141 1,320</td><td>241 660</td><td>Petition to revive - unintentional</td><td></td></tr> <tr><td>142 1,320</td><td>242 660</td><td>Utility issue fee (or reissue)</td><td></td></tr> <tr><td>143 450</td><td>243 225</td><td>Design issue fee</td><td></td></tr> <tr><td>144 670</td><td>244 335</td><td>Plant issue fee</td><td></td></tr> <tr><td>122 130</td><td>122 130</td><td>Petitions to the Commissioner</td><td></td></tr> <tr><td>123 50</td><td>123 50</td><td>Petitions related to provisional applications</td><td></td></tr> <tr><td>126 240</td><td>126 240</td><td>Submission of Information Disclosure Stmt</td><td></td></tr> <tr><td>581 40</td><td>581 40</td><td>Recording each patent assignment per property (times number of properties)</td><td></td></tr> <tr><td>146 790</td><td>246 395</td><td>Filing a submission after final rejection (37 CFR 1.129(a))</td><td></td></tr> <tr><td>149 790</td><td>249 395</td><td>For each additional invention to be examined (37 CFR 1.129(b))</td><td></td></tr> <tr><td colspan="3">Other fee (specify) _____</td><td></td></tr> <tr><td colspan="3">Other fee (specify) _____</td><td></td></tr> <tr> <td colspan="2" style="text-align: right;"> Reduced by Basic Filing Fee Paid </td> <td> SUBTOTAL (3) (\$) </td> </tr> </tbody> </table>	Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid	105 130	205 65	Surcharge - late filing fee or oath		127 50	227 25	Surcharge - late provisional filing fee or cover sheet.		139 130	139 130	Non-English specification		147 2,520	147 2,520	For filing a request for reexamination		112 920*	112 920*	Requesting publication of SIR prior to Examiner action		113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action		115 110	215 55	Extension for reply within first month		116 400	216 200	Extension for reply within second month		117 950	217 475	Extension for reply within third month		118 1,510	218 755	Extension for reply within fourth month		128 2,060	228 1,030	Extension for reply within fifth month		119 310	219 155	Notice of Appeal		120 310	220 155	Filing a brief in support of an appeal		121 270	221 135	Request for oral hearing		138 1,510	138 1,510	Petition to institute a public use proceeding		140 110	240 55	Petition to revive - unavoidable		141 1,320	241 660	Petition to revive - unintentional		142 1,320	242 660	Utility issue fee (or reissue)		143 450	243 225	Design issue fee		144 670	244 335	Plant issue fee		122 130	122 130	Petitions to the Commissioner		123 50	123 50	Petitions related to provisional applications		126 240	126 240	Submission of Information Disclosure Stmt		581 40	581 40	Recording each patent assignment per property (times number of properties)		146 790	246 395	Filing a submission after final rejection (37 CFR 1.129(a))		149 790	249 395	For each additional invention to be examined (37 CFR 1.129(b))		Other fee (specify) _____				Other fee (specify) _____				Reduced by Basic Filing Fee Paid		SUBTOTAL (3) (\$)
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid																																																																																																																					
105 130	205 65	Surcharge - late filing fee or oath																																																																																																																						
127 50	227 25	Surcharge - late provisional filing fee or cover sheet.																																																																																																																						
139 130	139 130	Non-English specification																																																																																																																						
147 2,520	147 2,520	For filing a request for reexamination																																																																																																																						
112 920*	112 920*	Requesting publication of SIR prior to Examiner action																																																																																																																						
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action																																																																																																																						
115 110	215 55	Extension for reply within first month																																																																																																																						
116 400	216 200	Extension for reply within second month																																																																																																																						
117 950	217 475	Extension for reply within third month																																																																																																																						
118 1,510	218 755	Extension for reply within fourth month																																																																																																																						
128 2,060	228 1,030	Extension for reply within fifth month																																																																																																																						
119 310	219 155	Notice of Appeal																																																																																																																						
120 310	220 155	Filing a brief in support of an appeal																																																																																																																						
121 270	221 135	Request for oral hearing																																																																																																																						
138 1,510	138 1,510	Petition to institute a public use proceeding																																																																																																																						
140 110	240 55	Petition to revive - unavoidable																																																																																																																						
141 1,320	241 660	Petition to revive - unintentional																																																																																																																						
142 1,320	242 660	Utility issue fee (or reissue)																																																																																																																						
143 450	243 225	Design issue fee																																																																																																																						
144 670	244 335	Plant issue fee																																																																																																																						
122 130	122 130	Petitions to the Commissioner																																																																																																																						
123 50	123 50	Petitions related to provisional applications																																																																																																																						
126 240	126 240	Submission of Information Disclosure Stmt																																																																																																																						
581 40	581 40	Recording each patent assignment per property (times number of properties)																																																																																																																						
146 790	246 395	Filing a submission after final rejection (37 CFR 1.129(a))																																																																																																																						
149 790	249 395	For each additional invention to be examined (37 CFR 1.129(b))																																																																																																																						
Other fee (specify) _____																																																																																																																								
Other fee (specify) _____																																																																																																																								
Reduced by Basic Filing Fee Paid		SUBTOTAL (3) (\$)																																																																																																																						
<h3>1. FILING FEE</h3> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Large Entity Fee Code (\$)</th> <th>Small Entity Fee Code (\$)</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr><td>101 790</td><td>201 395</td><td>Utility filing fee</td><td>395.</td></tr> <tr><td>106 330</td><td>206 165</td><td>Design filing fee</td><td></td></tr> <tr><td>107 540</td><td>207 270</td><td>Plant filing fee</td><td></td></tr> <tr><td>108 790</td><td>208 395</td><td>Reissue filing fee</td><td></td></tr> <tr><td>114 150</td><td>214 75</td><td>Provisional filing fee</td><td></td></tr> <tr> <td colspan="3" style="text-align: right;">SUBTOTAL (1)</td> <td>(\$ 395)</td> </tr> </tbody> </table> <h3>2. CLAIMS</h3> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Total Claims</td> <td>23</td> <td>-20 =</td> <td>3</td> <td>Extra</td> <td>X</td> <td>Fee from below</td> <td>11</td> <td>=</td> <td>33</td> <td>Fee Paid</td> </tr> <tr> <td>Independent Claims</td> <td>3</td> <td>-3 =</td> <td>0</td> <td></td> <td>X</td> <td>0</td> <td></td> <td>=</td> <td>0</td> <td></td> </tr> <tr> <td>Multiple Dependent Claims</td> <td></td> <td></td> <td></td> <td></td> <td>X</td> <td></td> <td></td> <td>=</td> <td></td> <td></td> </tr> </table> <h3>Large Entity Small Entity</h3> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Fee Code (\$)</th> <th>Fee Code (\$)</th> <th>Fee Code (\$)</th> <th>Fee Code (\$)</th> <th>Fee Description</th> </tr> </thead> <tbody> <tr><td>103 22</td><td>203 11</td><td></td><td></td><td>Claims in excess of 20</td></tr> <tr><td>102 82</td><td>202 41</td><td></td><td></td><td>Independent claims in excess of 3</td></tr> <tr><td>104 270</td><td>204 135</td><td></td><td></td><td>Multiple dependent claim</td></tr> <tr><td>109 82</td><td>209 41</td><td></td><td></td><td>Reissue independent claims over original patent</td></tr> <tr><td>110 22</td><td>210 11</td><td></td><td></td><td>Reissue claims in excess of 20 and over original patent</td></tr> <tr> <td colspan="4" style="text-align: right;">SUBTOTAL (2)</td> <td>(\$ 428.00)</td> </tr> </tbody> </table>	Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid	101 790	201 395	Utility filing fee	395.	106 330	206 165	Design filing fee		107 540	207 270	Plant filing fee		108 790	208 395	Reissue filing fee		114 150	214 75	Provisional filing fee		SUBTOTAL (1)			(\$ 395)	Total Claims	23	-20 =	3	Extra	X	Fee from below	11	=	33	Fee Paid	Independent Claims	3	-3 =	0		X	0		=	0		Multiple Dependent Claims					X			=			Fee Code (\$)	Fee Code (\$)	Fee Code (\$)	Fee Code (\$)	Fee Description	103 22	203 11			Claims in excess of 20	102 82	202 41			Independent claims in excess of 3	104 270	204 135			Multiple dependent claim	109 82	209 41			Reissue independent claims over original patent	110 22	210 11			Reissue claims in excess of 20 and over original patent	SUBTOTAL (2)				(\$ 428.00)																								
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid																																																																																																																					
101 790	201 395	Utility filing fee	395.																																																																																																																					
106 330	206 165	Design filing fee																																																																																																																						
107 540	207 270	Plant filing fee																																																																																																																						
108 790	208 395	Reissue filing fee																																																																																																																						
114 150	214 75	Provisional filing fee																																																																																																																						
SUBTOTAL (1)			(\$ 395)																																																																																																																					
Total Claims	23	-20 =	3	Extra	X	Fee from below	11	=	33	Fee Paid																																																																																																														
Independent Claims	3	-3 =	0		X	0		=	0																																																																																																															
Multiple Dependent Claims					X			=																																																																																																																
Fee Code (\$)	Fee Code (\$)	Fee Code (\$)	Fee Code (\$)	Fee Description																																																																																																																				
103 22	203 11			Claims in excess of 20																																																																																																																				
102 82	202 41			Independent claims in excess of 3																																																																																																																				
104 270	204 135			Multiple dependent claim																																																																																																																				
109 82	209 41			Reissue independent claims over original patent																																																																																																																				
110 22	210 11			Reissue claims in excess of 20 and over original patent																																																																																																																				
SUBTOTAL (2)				(\$ 428.00)																																																																																																																				

SUBMITTED BY				Complete (if applicable)	
Typed or Printed Name	Robert L. Showalter			Reg. Number	33,579
Signature	X <i>Robert L. Showalter</i>	Date	12/12/97	Deposit Account User ID	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

APPARATUS AND METHODS FOR ENHANCING ELECTRONIC AUDIO SIGNALS

FIELD OF THE INVENTION

5 The present invention relates to the enhancement of electronic audio signals to improve the quality of sound produced from those signals, and more particularly to an apparatus and method for harmonically enhancing an electronic audio signal without the use of an active circuit element.

BACKGROUND OF THE INVENTION

10 It is usually considered more pleasurable to hear music, singing or other such complex sounds live, rather than hearing the same sound after it has been converted into an electronic audio signal and re-converted back into audible sound.

15 Many of the sounds we hear, especially musical notes, are often a composite. For example, a musical note having a basic pitch or fundamental frequency, usually contains components of the fundamental frequency called harmonics. These harmonics create the tonal quality or timbre of the sound, such as a musical note, that is often unique to the musical instrument or other sound producing source. In other words, these harmonics enrich the sound we hear. Numerous sound reproduction systems have been developed in an attempt to add harmonic enhancement to audio signals. However, these systems are often very sophisticated and expensive and the sound quality produced with such systems still falls short of the perceived
20 quality of the original sound heard live.

25 A relatively unsophisticated and inexpensive system has been developed which produces an enhanced electronic audio signal which, when converted into audible sound, exhibits an improved harmonic quality compared to that of the original input audio signal and has been perceived as more closely duplicating the experience of hearing the original live sound in an acoustically designed environment. This system is disclosed in U.S. Patent No. 5,361,306, which is assigned to the assignee of the present application. The exemplary circuits disclosed in

TRD 009 PA

the 5,361,306 patent include an input stage having a field inducing coil and an output stage having an electromagnetic field receptor (e.g., another coil) and an output. Input audio signals are transmitted through the inducing coil to set-up an electromagnetic field. The field inducing coil and the electromagnetic field receptor are weakly coupled such that when an input audio signal is transmitted through the field inducing coil, an enhanced audio signal is available at the output.

The present invention is an improvement to the inventions disclosed in the 5,361,306 patent. The present invention has a less complicated structure and is less expensive.

SUMMARY OF THE INVENTION

In accordance with the present invention, a number of methods and apparatus are provided for simply and inexpensively enhancing an electronic audio signal in such a way that the quality of audible sound produced from the audio signal more closely approaches that of the original sound heard live in an acoustically designed environment. Sound produced from an audio signal enhanced in accordance with the present invention appears to resist degradation at high volumes and tends to eliminate, or at least significantly reduce, the formation of sweet spots. It is desirable for a circuit according to the present invention to be geared toward restoring the perception of harmonics that are normally lost due to the limitations of audio conversion equipment, the recording process, shortcomings of the recording media and/or the like.

In one aspect of the present invention, an apparatus is provided for enhancing the quality of an input audio signal made up of frequency components within a band of frequencies having a low end and a high end. An apparatus, according to the principles of the present invention, includes a passive circuit that causes such an input audio signal, transmitted therethrough, to be distorted into an enhanced audio signal that exhibits an improved harmonic quality compared to that of the original input audio signal. This distortion is a non-linear amplification of frequency components of the input audio signal. The amplification is varied in such a manner that the

human ear is able to better perceive or pick up and register the harmonic character of the audio signal.

In a first embodiment of the present invention, the amplification of the frequency components in the input audio signal increases as the frequency components increase in frequency from an intermediate frequency up to a peak high frequency. The intermediate frequency may also be referred to as a reference frequency. Above the peak high frequency, it may be desirable for the amplification to decrease as the frequency components increase in frequency from the peak high frequency to the high end frequency. Instead of the peak high frequency being a single frequency, it may be desirable for the peak high frequency to be a range of frequencies such that the frequency components falling within the range have generally the same amplitude. The peak high frequency may be in the range of from about 6 KHz to about 30 KHz. Amplification of the frequency component(s) at the peak high frequency may be from about 1.5 times to about 3.0 times the amplification of an intermediate frequency component.

In a second embodiment of the present invention, the amplification of the frequency components in the input audio signal increases as the frequency components increase in frequency from a first intermediate frequency up to a peak high frequency and decrease in frequency from a second intermediate frequency down to a peak low frequency. The first and second intermediate frequencies may be referred to as first and second reference frequencies. The first and second intermediate frequencies may be the same frequency or different frequencies. Above the peak high frequency, it may be desirable for the amplification to decrease as the frequency components increase in frequency from the peak high frequency to the high end frequency. Below the peak low frequency, it may be desirable for the amplification to decrease as the frequency components decrease in frequency from the peak low frequency down to the low end frequency.

Instead of each being a single frequency, it may be desirable for the peak high frequency, the peak low frequency or both to be a range of frequencies such that frequency components falling within each range have generally the same amplitude. The peak high frequency may be in the range of from about 6 KHz to about 30 KHz. Amplification of the frequency component(s)

at the peak high frequency may be from about 1.5 times to about 3.0 times the amplification of the first intermediate frequency component. The peak low frequency may be in the range of from about 20 Hz to about 1 KHz. Amplification of the frequency component(s) at the peak low frequency may be from about 1.25 times to about 2.0 times the amplification of the second intermediate frequency component.

In accordance with a first embodiment of the present invention, the passive circuit may comprise a single transformer for non-linearly amplifying frequency components of the input audio signal such that the amplification of the frequency components in the input audio signal is increased as the frequency components increase in frequency from an intermediate frequency up to a peak high frequency. The distortion effected by the single transformer may also described in the following equivalent manner. The single transformer amplifies frequency components of the input audio signal such that the frequency components in the input audio signal increase in amplitude as the frequency components increase in frequency from an intermediate frequency up to a peak high frequency.

In accordance with a second embodiment of the present invention, the passive circuit may comprise first and second transformers for non-linearly amplifying frequency components of the input audio signal such that the amplification of the frequency components in the input audio signal increases as the frequency components increase in frequency from a first intermediate frequency up to a peak high frequency and decrease in frequency from a second intermediate frequency down to a peak low frequency. The distortion effected by the first and second transformers may also be described in the following equivalent manner. The first and second transformers amplify frequency components of the input audio signal such that the frequency components in the input audio signal increase in amplitude as the frequency components increase in frequency from a first intermediate frequency up to a peak high frequency and decrease in frequency from a second intermediate frequency down to a peak low frequency. The first and the second intermediate frequencies may be the same frequency or different frequencies.

In accordance with a second aspect of the present invention, an audio system is provided comprising an audio source, an audio amplifier and a passive circuit. The audio source generates

TRD 009 PA

an input audio signal made up of frequency components within a band of frequencies having a high end and a low end. The audio amplifier generates a speaker drive signal. The passive circuit couples the input audio signal to the audio amplifier and distorts the input audio signal, when transmitted therethrough, into an enhanced audio signal that exhibits an improved harmonic quality compared to that of the input audio signal.

It is desirable that no active elements be coupled between the audio source and the audio amplifier.

The passive circuit may comprise a single transformer which effects amplitude distortion of the input signal as defined by a first portion of a frequency response curve. The first portion of the curve increases non-linearly from an intermediate frequency up to a peak high frequency. Alternatively, the passive circuit may comprise first and second transformers which effect amplitude distortion of the input signal as defined by first and second portions of a frequency response curve. The first portion of the curve increases non-linearly from a first intermediate frequency up to a peak high frequency. The second curve portion increases non-linearly from a second intermediate frequency down to a peak low frequency. The first and second intermediate frequencies may be the same frequency or different frequencies.

In accordance with a third aspect of the present invention, a method is provided for enhancing the quality of electronic audio signals. The method comprises the steps of providing an input audio signal made up of frequency components within a frequency band having a high end and a low end, and distorting the input audio signal into an enhanced audio signal by passing the input audio signal through a passive circuit to amplify frequency components of the input signal. In accordance with one embodiment of the present invention, the amplification of the frequency components in the input audio signal increases as the frequency components increase in frequency from an intermediate frequency up to a peak high frequency. In accordance with another embodiment of the present invention, the amplification of the frequency components in the input audio signal increases as the frequency components increase in frequency from a first intermediate frequency up to a peak high frequency and decrease in frequency from a second

TRD 009 PA

intermediate frequency down to a peak low frequency. The first and second intermediate frequencies may be the same frequency or different frequencies.

The present method can include the step of processing one or more of the enhanced audio signals into sound. The scope of the present invention is intended to include the sound that is so produced. The present enhanced audio signal and the sound produced therefrom includes audio signals and sounds having frequency components which fall within the range of normal human hearing (i.e., approximately 20 Hz to 20KHz).

The present method can also include the step of transmitting one or more audio signals, enhanced according to the present invention, from one location to another. The present method can further include the step of recording one or more of the present enhanced audio signals onto a recording medium. The scope of the present invention is also intended to include the recording medium having one or more of the present enhanced audio signals recorded thereon. The recording medium can be a magnetic recording medium (e.g., reel-to-reel tape, cassette tape, magnetic disk, etc.) or an optical recording medium (e.g, compact disk, video disk, etc.). The present invention is not intended to be limited to any particular type of recording medium or method of recording thereon.

The present invention provides an apparatus and method for enhancing the harmonic quality of an electronic audio signal, in particular an audio signal having a complex wave form (i.e., multiple frequency components such as, for example, music, singing, speech, animal sounds, naturally occurring sounds, equipment noises, and the like. An audio signal enhanced according to the present invention exhibits an improved harmonic quality compared to that of the input electronic audio signal. It has been found that a similar harmonic enhancement can be obtained using the circuits disclosed in U.S. Patent No. 5,361,306; U.S. Patent Application Serial No. 08/472,876, having a filing date of June 7, 1995 and entitled APPARATUS AND METHOD OF ENHANCING ELECTRONIC AUDIO SIGNALS; and U.S. Patent Application Serial No. 08/909,807, having a filing date of August 12, 1997 and entitled APPARATUS AND

METHODS FOR THE HARMONIC ENHANCEMENT OF ELECTRONIC AUDIO SIGNALS,
the disclosures of which are incorporated herein by reference.

The present teachings and disclosure reveal that there are a variety of other ways of obtaining the same or a similar harmonic enhancement in an electronic audio signal. Having been provided with the teachings and the exemplary circuits disclosed herein, it will be a matter of simple trial and error experimentation, if any, for one of ordinary skill in the art to design additional ways to produce the same or a similar enhancing effect. Accordingly, the general and specific circuits disclosed herein are examples only and the present invention is not intended to be so limited.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of a transformer constructed in accordance with a first embodiment of the present invention;

Fig. 2 is a perspective view of the bobbin of the transformer illustrated in Fig. 1;

Fig. 3 is a view taken along view line 3-3 in Fig. 1;

Fig. 4 is a schematic side view of the bobbin illustrated in Fig. 3;

Fig. 5 is a circuit diagram of a passive circuit constructed in accordance with a first embodiment of the present invention coupled to an audio signal source and an audio amplifier;

Fig. 6 is an exploded view of two E-core sections and two I-core sections of the core illustrated in Fig. 1;

Fig. 7 is an illustration of first, second and third frequency response curves generated by a passive circuit constructed in accordance with a first embodiment of the present invention;

Fig. 8 is a circuit diagram of a passive circuit constructed in accordance with a second embodiment of the present invention coupled to an audio source and an audio amplifier;

Fig. 9 is a perspective view of a first transformer constructed in accordance with a second embodiment of the present invention;

Fig. 10 is a perspective view of the bobbin of the transformer illustrated in Fig. 9;

Fig. 10A is a schematic side view of the bobbin illustrated in Fig. 10;

Fig. 11 is a view taken along view line 11-11 in Fig. 9;

Fig. 12 is a perspective view of a second transformer constructed in accordance with a second embodiment of the present invention;

Fig. 13 is a perspective view of the bobbin of the transformer illustrated in Fig. 12;

Fig. 13A is a schematic side view of the bobbin illustrated in Fig. 13;

Fig. 14 is a view taken along view line 14-14 in Fig. 12; and

Fig. 15 is an illustration of first, second and third frequency response curves generated by a passive circuit constructed in accordance with a second embodiment of the present invention;

DETAILED DESCRIPTION OF THE INVENTION

Although the present invention is herein described in terms of specific embodiments, it will be readily apparent to those skilled in this art that various modifications, re-arrangements, and substitutions can be made without departing from the spirit of the invention. The scope of the present invention is thus only limited by the claims appended hereto.

Each of the particular exemplary embodiments disclosed in the present application produces an enhancement of an electronic audio signal. An apparatus, according to the principles of the present invention, comprises a passive circuit capable of distorting an input audio signal transmitted therethrough by non-linearly (i.e., non-uniformly) amplifying enhancing harmonics or frequency components in the input audio signal. By increasing the amplitude of enhancing harmonics in this manner, the resulting enhanced audio signal exhibits an improved harmonic quality compared to that of the input audio signal.

The present circuit is operatively adapted to accomplish enhancement without using any active elements such as operational amplifiers, transistors, vacuum tubes, etc. Thus, the passive circuit does not add power to the input audio signal.

Exemplary Embodiment No. 1

A passive circuit 5 for enhancing an electronic audio signal, constructed in accordance with a first embodiment of the present invention, is illustrated in the circuit diagram of Fig. 5.

TRD 009 PA

The circuit 5 comprises a single transformer 10. The transformer 10 includes a bobbin 20, a ferromagnetic core 30 and two magnetically coupled coils 40 and 42, see Figs. 1-3 and 5.

The bobbin 20 may be formed from a fiber reinforced polymeric material. In the illustrated embodiment, the bobbin 20 comprises a glass fiber reinforced nylon. The bobbin 20 has a substantially rectangular-shaped tubular portion 22 having a core-receiving aperture 22a extending through it. Provided at opposite ends of the tubular portion 22 are first and second flanges 24 and 26. The wall thickness of each of the tubular portion 22 and the flanges 24 and 26 is about .040 inch. The width W_F and length L_F of each flange 24 and 26 are about 1.48 inches and 1.54 inches respectively. The width W_A , height H_A and length L_A of the aperture 22a are about .765 inch, 1.02 inches, and .765 inch, respectively. Each of the flanges 24 and 26 includes a pin-containing portion 24a and 26a having six L-shaped pins embedded therein. The twelve pins are designated in the drawings P_1 - P_{12} . One such bobbin is commercially available from Plastron Corporation under the product designation "94HB."

The first coil 40 is defined by first and second primary winding portions 40a and 40b which are connected in series, see Fig. 5. The second coil 42 is defined by first and second secondary winding portions 42a and 42b which are connected in series.

A first wire 44, a type "39single-poly-nylon(SPN)155°C" wire, wherein 39 is the wire gauge, SPN is the outer coating material, and 155°C is the wire temperature rating is randomly wound in a clockwise direction about the tubular portion 22 to form the first primary winding portion 40a. The winding portion 40a comprises 1000 turns and has a DC resistance of about $285 \text{ Ohms} \pm 10\%$. It is soldered or otherwise connected to pins P_1 and P_3 , see Figs. 2, 4 and 5. A first layer 51 of a fiber reinforced polymeric film is wrapped about the first primary winding portion 40a, see Fig. 3. In the illustrated embodiment, the film comprises a glass fiber reinforced polyester film having a thickness of about .0065 inch. Such a film is commercially available from TESA Inc. under the product designation "IL-4426." The first layer 51 has a thickness of about .0065 inch.

A second wire 48, a type "34SPN155°C" wire, is randomly wound in a counter-clockwise direction about the first film layer 51 so as to form the first secondary winding portion 42a. The winding portion 42a comprises 2000 turns and has a DC resistance of about 156 Ohms \pm 10%. It is soldered or otherwise connected to pins P₇ and P₉. A second layer 53 of the fiber reinforced polymeric film described above is wrapped about first secondary winding portion 42a, see Fig. 3. The second layer 53 has a thickness of about .013 inch.

A third wire 50, a type "39SPN155°C" wire, is randomly wound in a clockwise direction about the second film layer 53 so as to form the second primary winding portion 40b. The winding portion 40b comprises 1000 turns and has a DC resistance of about 335 Ohms \pm 10%. It is soldered or otherwise connected to pins P₃ and P₆. A third layer 55 of the fiber reinforced polymeric film is wrapped about second primary winding portion 40b, see Fig. 3. The third layer 55 has a thickness of about .013 inch. The first and second primary winding portions 40a and 40b are connected in series via pin P₃ so as to define the first coil 40 extending between pins P₁ and P₆.

A fourth wire 52, a type "34SPN155°C" wire, is randomly wound in a counter-clockwise direction about the third film layer 55 so as to form the second secondary winding portion 42b. The winding portion 42b comprises 2000 turns and has a DC resistance of about 186 Ohms \pm 10%. It is soldered or otherwise connected to pins P₉ and P₁₁. A fourth layer 57 of the fiber reinforced polymeric film is wrapped about second secondary winding 42b. The fourth layer 57 has a thickness of about .0065 inch. The first and second secondary winding portions 42a and 42b are connected in series via pin P₉ so as to define the second coil 42 extending between pins P₇ and P₁₁.

The first, second, third and fourth wires 44, 48, 50 and 52 are commercially available from the Phelps Dodge Corporation.

The core 30 is formed from numerous E-core and I-core sections 32 and 34, see Figs. 1, 3 and 6. The sections 32 and 34 comprise a ferromagnetic material, such as a 24 gauge, M50 grade steel. The sections 32 and 34 are assembled by stacking the E-core and I-core sections 32

TRD 009 PA

and 34 alternatively so that each I-core section 34 lies between adjacent E-core sections 32, see Fig. 6. A single I-core section 34 may be laminated to each E-core section 32 before assembly. Center portions 32a of the E-core sections 32 fill the core-receiving aperture 22a of the bobbin 20. After assembly, the sections 32 and 34 are laminated to one another by coating the outer surfaces of the assembled sections 32 and 34 with a varnish. Such a varnish is commercially available from P.D. George Co. under the product designation "77X010." In the illustrated embodiment, each E-core section 32 has a thickness of about .025 inch. Each I-core section 34 has a thickness of about .025 inch. The length L_C of the core 30 is about 2.25 inches, the thickness T_C of the core 30 is about .750 inch, and the height H_C of the core 30 is about 1.875 inch, see Fig. 1.

The primary winding portions 40a and 40b are interleaved with the secondary winding portions 42a and 42b so as to achieve a high degree of coupling between the primary winding portions 40a, 40b and the secondary winding portions 42a, 42b as well as to minimize the capacitance between the winding portions 40a, 40b and 42a, 42b. The transformer 10 is designed with very low flux density to increase the ability of the transformer 10 to accept low level audio signals, increase primary inductance, decrease capacitive reactance and increase the overall frequency response of the circuit 5.

The passive circuit 5 is intended to be coupled directly to an audio signal source S, such as a CD player, a laser disc player, a tape player, a radio, a digital audio tape (DAT) player, and to an audio amplifier A, such as a a preamplification stage, e.g., a solid state or vacuum tube preamplifier, or a power amplification stage, e.g., an integrated power amplifier, a vacuum tube power amplifier, a solid state power amplifier or a hybrid power amplifier. Any commercially available connector(s) may be used to connect the passive circuit 5 to the signal source including a single-ended connector or a balanced connector. No active element is connected between the source S and the audio amplifier A, see Fig. 5. It has been found that when the transformer 10 is coupled in this manner and an input audio signal made up of frequency components within a band of frequencies having a low end and a high end is transmitted through the transformer 10,

the audio signal is distorted into an enhanced audio signal that exhibits an improved harmonic quality compared to that of the original input audio signal. This distortion is a non-linear amplification of at least a portion of the frequency components of the input audio signal. The amplification is preferably varied in a such manner that the human ear is able to better perceive or pick up and register the harmonic character of the audio signal. For example, the frequency components near the high end of the band of frequencies may be amplified by an amount which exceeds the amount by which intermediate frequency components between the low and high ends of the band of frequencies are amplified.

In Fig. 7, first, second and third exemplary frequency response curves C_1 , C_2 , C_3 , generated by a passive circuit 5 constructed in accordance with the illustrated embodiment described above, are shown. For each curve, output voltages are plotted versus frequency for normalized input audio signals. The frequency response curves C_1 , C_2 , C_3 were obtained by connecting the first coil 40 of the transformer 10 to a signal source S, a conventional signal generator, which generated a 1 Volt input signal which was swept through a band of frequencies from about 20 Hz to about 22 KHz and connecting the second coil 42 of the transformer 10 to resistive loads of 20 KOHMS (Curve C_1), 50 KOHMS (Curve C_2), and 100 KOHMS (Curve C_3), which loads represented equivalent impedances that the transformer 10 might see when connected to the inputs of conventional audio amplifiers. No active element was interposed between the input source S and any one of the resistive loads.

Each of the first, second and third curves C_1 , C_2 , C_3 represents the amplification that occurs to frequency components of an input audio signal when the input audio signal passes through the passive circuit 5 and the output (i.e., the second coil 42) of the passive circuit 5 is connected to a resistive load. The resistive load is 20 KOHMS for curve C_1 , 50 KOHMS for curve C_2 , and 100 KOHMS for curve C_3 . From these three curves C_1 , C_2 , C_3 , it is apparent that an input audio signal made up of frequency components falling within a band of frequencies having a low end and a high end is distorted when transmitted through the passive circuit 5. This distortion is a non-linear amplification of the frequency components of the input audio signal.

TRD 009 PA

Specifically, the amplification of the frequency components of the input audio signal is substantially constant for intermediate frequency components falling within a band of frequencies of about 20 Hz to about 3.5 KHz and increases for frequency components increasing in frequency from about 3.5 KHz up to a peak high frequency of about 20 KHz. Above the peak high frequency of about 20 KHz, the amplification decreases as the frequency components increase in frequency from the peak high frequency of about 20 KHz to a high end frequency of about 22 KHz. The amplification or gain is between about 1.5 and 2.0 for the intermediate frequency components falling within the band of frequencies of about 20 Hz to about 5 KHz and is between about 2.6 and about 4.8 for frequency components at the peak high frequency. Hence, for Curve C₁, the amplification of the frequency component at the peak high frequency is about 1.5 times the average amplification of a range of intermediate frequency components from 20 Hz to 3.5 KHz. For Curve C₂, the amplification of the frequency component at the peak high frequency is about 2.0 times the average amplification of a range of intermediate frequency components from 20 Hz to 3.5 KHz. For Curve C₃, the amplification of the frequency component at the peak high frequency is about 2.8 times the average amplification of a range of intermediate frequency components from 20 Hz to 3.5 KHz.

It is believed that the frequency response of the passive circuit 5 for a given load can be varied by changing one or more of the following: the number of turns of one or both of the coils 40 and 42; the size and type of wire used to make up the coils 40 and 42; the DC resistance of one or more of the first and second primary winding portions 40a and 40b and the first and second secondary winding portions 42a and 42b; the size of the core 30; and the gauge and grade of the material used to form the core 30. It is also believed that if the capacitance of the transformer 10 is varied, the amplification of the frequency components at the high end of the band of frequencies may be varied. Capacitance may be altered by changing the thickness of one or more of the film layers 51, 53 and 55; the DC resistance of one or more of the winding portions 40a, portions 40a, 42a, 40b and 42b; and/or the location of one or more of the winding portions 40a, 42a, 40b and 42b. Thus, an empirical determination is required to determine

exactly the make up of a transformer 10 in order to effect a desired frequency response when the transformer is coupled to a given load.

Thus, in accordance with a first embodiment of the present invention, an input audio signal is distorted into an enhanced audio signal by passing the input audio signal through a passive circuit 5 to amplify frequency components of the input signal. The amplification of the frequency components in the input audio signal increases as the frequency components increase in frequency from an intermediate frequency up to a peak high frequency. Above the peak high frequency, it is desirable for the amplification to decrease as the frequency components increase in frequency from the peak high frequency to the high end frequency.

It is further contemplated with regard to the first embodiment of the present invention that instead of the peak high frequency comprising a single frequency, it may be desirable for the peak high frequency to be a relatively narrow range of frequencies such that the frequency components falling within the narrow range have generally the same amplitude.

Curves C_1 , C_2 and C_3 are provided for illustrative purposes only. It is believed that the amplification of intermediate frequency components, e.g., those of about 20 Hz to about 3.5 KHz, may be unity gain (1.0), less than 1.0 or greater than 1.0. The peak high frequency may be in the range of from about 6 KHz to about 30 KHz. Amplification of the frequency component(s) at the peak high frequency may be from about 1.5 times to about 3.0 times the amplification of intermediate frequency component of the average amplification of a range of intermediate frequency components.

It is further contemplated that the order of the winding portions 40a, 40b, 42a and 42b may vary so as to shield incoming electromagnetic interference (EMI) and radio frequency interference (RFI) radiation. Thus, the second wire 48 may be wound first on the tubular portion 22 in a counter-clockwise direction, followed by the first wire 44 which is wound in a clockwise direction, followed by the fourth wire 52 which is wound in a counter-clockwise direction, followed by the third wire 50 which is wound in a clockwise direction. Hence, the order of the winding portions is as follows: first secondary winding portion 42a followed by first primary winding portion 40a followed by second secondary winding portion 42b followed by second

primary winding portion 40b. The second primary winding portion 40b acts as a shield such that its own flux lines cancel most incoming EMI and RFI radiation.

Exemplary Embodiment No. 2

A passive circuit 300 comprising first and second transformers 100 and 200, constructed in accordance with a second embodiment of the present invention, is illustrated in the circuit diagram of Fig. 8. The first and second transformers 100 and 200 are constructed in essentially the same manner as the transformer 10 described above and are illustrated in Figs. 9, 10, 10A and 11 and 12, 13, 13A and 14. The first transformer 100 includes a bobbin 120, see Figs. 10 and 10A, a ferromagnetic core 130, see Fig. 9, and two magnetically coupled coils 140 and 142, see Fig. 8. The second transformer 200 includes a bobbin 220, see Figs. 13 and 13A, a ferromagnetic core 230, see Fig. 12, and two magnetically coupled coils 240 and 242, see Fig. 8.

The bobbins 120 and 220 are constructed in essentially the same manner as bobbin 20 described above. In the illustrated embodiment, the bobbins 120 and 220 are formed from a glass fiber reinforced nylon.

The bobbin 120 has a substantially rectangular-shaped tubular portion 122 having a core-receiving aperture 122a extending through it. Provided at opposite ends of the tubular portion 122 are first and second flanges 124 and 126. The wall thickness of each of the tubular portion 122 and the flanges 124 and 126 is about .040 inch. The width W_F and length L_F of each flange 124 and 126 are about 1.23 inches and 1.34 inches, respectively. The width W_A , height H_A and length L_A of the aperture 122a are about .640 inch, .830 inch, and .640 inch, respectively. Each of the flanges 124 and 126 includes a pin-containing portion 124a and 126a having six L-shaped pins embedded therein. The twelve pins are designated in the drawings P_1 - P_{12} .

The bobbin 220 has a substantially rectangular-shaped tubular portion 222 having a core-receiving aperture 222a extending through it. Provided at opposite ends of the tubular portion 222 are first and second flanges 224 and 226. The wall thickness of each of the tubular portion 222 and the flanges 224 and 226 is about .040 inch. The width W_F and length L_F of each flange

TRD 009 PA

224 and 226 are about 1.48 inches and 1.54 inches, respectively. The width W_A , height H_A and length L_A of the aperture 222a are about .765 inch, 1.02 inches, and .765 inch, respectively. Each of the flanges 224 and 226 includes a pin-containing portion 224a and 226a having six L-shaped pins embedded therein. The twelve pins are designated in the drawings P_1 - P_{12} .

5 The first coil 140 of the transformer 100 is defined by first and second primary winding portions 140a and 140b which are connected in series, see Fig. 8. The second coil 142 is defined by first and second secondary winding portions 142a and 142b which are connected in series.

10 A first wire 144, a type "39single-poly-nylon(SPN) 155°C" wire, is randomly wound in a clockwise direction about the tubular portion 122 to form the first primary winding portion 140a. The winding portion 140a comprises 500 turns and has a DC resistance of about 106 Ohms \pm 10%. It is soldered or otherwise connected to pins P_1 and P_3 , see Figs. 8, 10, and 10A. A first layer 151 of a fiber reinforced polymeric film, such as the one discussed above with regard to the first embodiment of the present invention, is wrapped about the first primary winding portion 140a, see Fig. 11. The first layer 151 has a thickness of about .0065 inch.

15 A second wire 148, a type "32SPN 155°C" wire, is randomly wound in a counter-clockwise direction about the first film layer 151 so as to form the first secondary winding portion 142a. The winding portion 142a comprises 1000 turns and has a DC resistance of about 46 Ohms \pm 10%. It is soldered or otherwise connected to pins P_7 and P_9 . A second layer 153 of the fiber reinforced polymeric film is wrapped about first secondary winding portion 142a, see Fig. 11. The second layer 153 has a thickness of about .0065 inch.

20 A third wire 150, a type "39SPN 155°C" wire, is randomly wound in a clockwise direction about the second film layer 153 so as to form the second primary winding portion 140b. The wire 150 is soldered or otherwise connected to pin P_3 , randomly wound about the second film layer 153 about 400 turns, and connected to pin P_5 . In the illustrated embodiment, the third wire 150, after being connected to pin P_5 , is randomly wound about the second film layer 153 another 100 turns and soldered or otherwise connected to pin P_6 . In this embodiment, the winding portion 140b extends between pins P_3 and P_5 , comprises 400 turns and has a DC

TRD 009 PA

resistance of about 107 Ohms \pm 10%. A third layer 155 of the fiber reinforced polymeric film is wrapped about second primary winding portion 140b. The third layer 155 has a thickness of about .0065 inch. The first and second primary winding portions 140a and 140b of the first transformer 100 are connected in series via pin P_3 so as to define the first coil 140 extending
5 between pins P_1 and P_5 .

A fourth wire 152, a type "34SPN 155°C" wire, is randomly wound in a counter-clockwise direction about the third film layer 155 so as to form the second secondary winding portion 142b. The winding portion 142b comprises 1000 turns and has a DC resistance of about 58.0 Ohms \pm 10%. It is soldered or otherwise connected to pins P_9 and P_{11} . A fourth layer 157 of
10 the fiber reinforced polymeric film is wrapped about second secondary winding portion 142b. The fourth layer 157 has a thickness of about .0065 inch. The first and second secondary winding portions 142a and 142b of the first transformer 100 are connected in series via pin P_9 so as to define the second coil 142 extending between pins P_7 and P_{11} .

The wires 144, 148, 150 and 152 are commercially available from the Phelps Dodge Corporation.
15

The core 130 of the first transformer is formed from numerous E-core and I-core sections 132 and 134, see Figs. 9 and 11, in substantially the same manner as described above with regard to core 30. The sections 132 and 143 comprise a ferromagnetic material, such as a 29 gauge, M6 grade steel. In the illustrated embodiment, each E-core section 132 has a thickness of about .014
20 inch. Each I-core section 134 has a thickness of about .014 inch. The length L_C of the core 130 is about 1.875 inches, the thickness T_C of the core 130 is about .625 inch, and the height H_C of the core 130 is about 1.5625 inches, see Fig. 9.

The primary winding portions 140a and 140b are interleaved with the secondary winding portions 142a and 142b so as to achieve a high degree of coupling between the primary winding
25 portions 140a, 140b and the secondary winding portions 142a, 142b as well as to minimize the capacitance between the winding portions 140a, 140b and 142a, 142b. The transformer 100 is designed with very low flux density to increase the ability of the circuit 300 to accept low level

TRD 009 PA

audio signals, increase primary inductance, decrease capacitive reactance and increase the overall frequency response of the circuit 300.

The first coil 240 of the second transformer 200 is defined by first and second primary winding portions 240a and 240b which are connected in series, see Fig. 8. The second coil 242 is defined by first and second secondary winding portions 242a and 242b which are connected in series.

A first wire 244, a type "39single-poly-nylon(SPN)155°C" wire, is randomly wound in a clockwise direction about the tubular portion 222 of the bobbin 220 to form the first primary winding portion 240a. The winding portion 240a comprises 1000 turns and has a DC resistance of about 250 Ohms \pm 10%. It is soldered or otherwise connected to pins P₁ and P₃, see Figs. 8, 13 and 13A. A first layer 251 of a fiber reinforced polymeric film, such as the one used in the first embodiment described above, is wrapped about the first primary winding portion 240a. The first layer 251 has a thickness of about .0065 inch.

A second wire 248, a type "34SPN155°C" wire, is randomly wound in a counter-clockwise direction about the first film layer 251 so as to form the first secondary winding portion 242a. The winding portion 242a comprises 2000 turns and has a DC resistance of about 156 Ohms \pm 10%. It is soldered or otherwise connected to pins P₇ and P₉. A second layer 253 of the fiber reinforced polymeric film is wrapped about first secondary winding portion 242a, see Fig. 14. The second layer has a thickness of about .0065 inch.

A third wire 250, a type "39SPN155°C" wire, is randomly wound in a clockwise direction about the second film layer 253 so as to form the second primary winding portion 240b. The wire 250 is soldered or otherwise connected to pin P₃, randomly wound about the second film layer 253 about 500 turns, and connected to pin P₅. In the illustrated embodiment, the third wire 250, after being connected to pin P₅, is randomly wound about the second film layer 253 another 500 turns and soldered or otherwise connected to pin P₆. In this embodiment, the winding portion 240b extends between pins P₃ and P₅, comprises 500 turns and has a DC resistance of about 150 Ohms \pm 10%. A third layer 255 of the fiber reinforced polymeric film is

TRD 009 PA

wrapped about second primary winding portion 240b. The third layer 225 has a thickness of about .0065 inch. The first and second primary winding portions 240a and 240b of the second transformer 200 are connected in series via pin P_3 so as to define the first coil 240 extending between pins P_1 and P_5 .

5 A fourth wire 252, a type "34SPN155°C" wire, is randomly wound in a counter-clockwise direction about the third film layer 255 so as to form the second secondary winding portion 242b. The winding portion 242b comprises 2000 turns and has a DC resistance of about 186 Ohms \pm 10%. It is soldered or otherwise connected to pins P_9 and P_{11} . A fourth layer 257 of the fiber reinforced polymeric film (not shown) is wrapped about the second secondary winding portion 242b. The fourth layer 257 has a thickness of about .0065 inch. The first and second secondary winding portions 242a and 242b of the second transformer 200 are connected in series via pin P_9 so as to define the second coil 242 extending between pins P_7 and P_{11} .

The wires 244, 248, 250 and 252 are commercially available from the Phelps Dodge Corporation.

15 The core 230 is formed from numerous E-core and I-core sections 232 and 234, see Figs. 12 and 14, in the same manner as core 30 described above. The sections 232 and 234 comprise a ferromagnetic material, such as a 29 gauge, M6 grade steel. In the illustrated embodiment, each E-core section 232 has a thickness of about .014 inch. Each I-core section 234 has a thickness of about .014 inch. The length L_C of the core 230 is about 2.25 inches, the thickness T_C of the core 230 is about .750 inch, and the height H_C of the core 230 is about 1.875 inches, see Fig. 1.

20 The primary winding portions 240a and 240b are interleaved with the secondary winding portions 242a and 242b so as to achieve a high degree of coupling between the primary winding portions 240a, 240b and the secondary winding portions 242a, 242b as well as to minimize the capacitance between the winding portions 240a, 240b and 242a, 242b. The transformer 200 is designed with very low flux density to increase the ability of the passive circuit 300 to accept low level audio signals, increase primary inductance, decrease capacitive reactance and increase the overall frequency response of the circuit 300.

The first and second transformers 100 and 200 are connected to one another in series, as illustrated in Fig. 8, to define the passive circuit 300. A first hook-up or jumper wire 301, a type 24 gauge (UL 1007) lead wire, is coupled to pin P_5 of the first transformer 100 and to pin P_5 of the second transformer 200 and a second hook-up wire 303, a type 24 gauge (UL 1007) lead wire, is coupled to pin P_7 of the second transformer 200 and pin P_7 of the first transformer 100. The 24 gauge lead wire is commercially available from Belden Corporation.

The input of the passive circuit 300 may be coupled directly to an audio signal source S, such as a CD player, a DAT player, a laser disc player, a tape player and the like, and the output of the passive circuit 300 may be coupled directly to an audio amplifier, such as a pre-amplifier stage or a power amplifier stage, see Fig. 8. Any commercially available connector(s) may be used to connect the passive circuit 300 to the signal source including a single-ended connector or a balanced connector. No active element is connected between the source S and the audio amplifier A. It has been found that when the transformers 100 and 200 are used in this manner, they interact with one another such that when an input audio signal is transmitted through them, the audio signal is distorted into an enhanced audio signal that exhibits an improved harmonic quality compared to that of the original input audio signal.

In Fig. 15, first, second and third exemplary frequency response curves C_1 , C_2 , C_3 , generated by a passive circuit 300 constructed in accordance with the second embodiment described above, are shown. For each curve, output voltages are plotted versus frequency for normalized input signals. The frequency response curves C_1 , C_2 , C_3 were obtained by connecting pins P_1 of the first and second transformers 100 and 200 to a signal source S, a signal generator, which generated a 1 Volt input signal which was swept through a band of frequencies from about 20 Hz to about 22KHz and connecting pins P_{11} of the transformers 100 and 200 to resistive loads of 20 KOHMS (Curve C_1), 50 KOHMS (Curve C_2), and 100 KOHMS (Curve C_3), which loads represented equivalent impedances that the transformers 100 and 200 might see when connected to conventional audio amplifiers. No active element was interposed between the input source S and the resistive loads.

Each of the first, second and third curves C_1 , C_2 , C_3 represents the amplification that occurs to frequency components of an input audio signal when the input audio signal passes through the passive circuit 300 and the output of the passive circuit 300 is connected to a resistive load. The resistive load is 20 KOHMS for curve C_1 , 50 KOHMS for curve C_2 , and 100 KOHMS for curve C_3 . From these three curves C_1 , C_2 , C_3 , it is apparent that an input audio signal made up of frequency components falling within a band of frequencies having a low end and a high end is distorted when transmitted through the passive circuit 300. This distortion is a non-linear amplification of the frequency components of the input audio signal. Specifically, the amplification of the frequency components in the input signal increases as the frequency components increase in frequency from an intermediate frequency (about 2.0 KHz for a 20 KOHMS load and between about 2.5 KHz and 3.5 KHz for 50 KOHMS and 100 KOHMS loads) to a peak high frequency (about 22 KHz for 20 KOHMS, 50 KOHMS and 100 KOHMS loads) and decrease in frequency from the intermediate frequency down to a peak low frequency (about 20 Hz for a 20 KOHMS load, about 800 Hz for a 50 KOHMS load and about 1000 Hz for a 100 KOHMS load). The amplification of the frequency components at the peak high frequency is from about 2.0 to about 3.4. The amplification of the frequency components at the peak low frequency is from about 1.9 to about 2.5. Hence, for Curve C_1 , the amplification of the frequency component at the peak high frequency is about 1.8 times the amplification of the intermediate frequency component at 2 KHz and the amplification of the frequency component at the peak low frequency is about 1.7 times the amplification of the intermediate frequency component at 2 KHz.. For Curve C_2 , the amplification of the frequency component at the peak high frequency is about 1.8 times the amplification of the intermediate frequency component at 3 KHz and the amplification of the frequency component at the peak low frequency is about 1.3 times the amplification of the intermediate frequency component at 3 KHz. For Curve C_3 , the amplification of the frequency component at the peak high frequency is about 1.8 times the amplification of the intermediate frequency component at 3.5 KHz and the amplification of the

TRD 009 PA

frequency component at the peak low frequency is about 1.4 times the amplification of the intermediate frequency component at 3.5 KHz.

It is believed that the frequency response of the passive circuit 300 for a given load can be varied by changing one or more of the following: the number of turns of one or more of the coils 140, 142, 240, 242; the size and type of the wire used to make up one or more of the coils 140, 142, 240, 242; the DC resistance of one or more of the coils 140, 142, 240, 242; the shape and size of one or both of the cores 130 and 230; and the gauge and grade of the material used to form one or both of the cores 130 and 230. More specifically, the low end frequency response of the passive circuit 300 is controlled by factors such as: 1) the primary to secondary turns ratio (i.e., the ratio of the combined turns of the first coils 140 and 240 to the combined turns of the second coils 142 and 242); 2) the primary inductance which is controlled by the number of turns of the first and second coils 140, 142, 240, 242 and the gauge and grade of the material from which the cores 130 and 230 are made; 3) the DC resistance of the coils 140, 142, 240, 242, the size and type of wire used to make up the coils 140, 142, 240, 242, and the mean length of each turn of the coils 140, 142, 240, 242; and 4) the impedance of the signal source S and the load. The high end frequency response of the passive circuit 300 is controlled by factors such as: 1) the inter-windings capacitance, i.e., the capacitance between the first coils 140, 240 and the second coils 142, 242; 2) the intra-windings capacitance, i.e., the capacitance between adjacent primary and secondary winding portions on each transformer 100 and 200; 3) primary and secondary winding portion placement; and 4) the impedance of the signal source S and the load.

It is also believed that if the capacitance of the transformer is varied, the amplification of the frequency components at the high end of the band of frequencies may be varied. Capacitance may be altered by changing the thickness of one or more of the film layers 151, 153, 155, 251, 253, 255; the DC resistance of one or more of the winding portions 140a, 142a, 140b, 142b, 240a, 242a, 240b, 242b and/or the location of one or more of the winding portions 140a, 142a, 140b, 142b, 240a, 242a, 240b, 242b. It is further believed that if the inductance of one or both of the transformers 100 and 200 is varied, the amplification of the frequency components at the low

end of the band of frequencies may be varied. Inductance can be altered by changing the combined turns of the first coils 140 and 240 and/or the gauge and grade of the material from which the cores 130 and 230 are made. Thus, an empirical evaluation is required to determine exactly the make up of the transformers 100 and 200 in order to effect a desired frequency response when the transformers 100 and 200 are coupled to a given load.

In accordance with a second embodiment of the present invention, an input audio signal is distorted into an enhanced audio signal by passing the input audio signal through a passive circuit 300 to amplify frequency components of the input signal. The amplification of the frequency components in the input audio signal increases as the frequency components increase in frequency from a first intermediate or reference frequency up to a peak high frequency and decrease in frequency from a second intermediate or reference frequency down to a peak low frequency. The first and second intermediate frequencies may be the same frequency or different frequencies. Above the peak high frequency, it may be desirable for the amplification to decrease as the frequency components increase in frequency from the peak high frequency to the high end frequency. Below the peak low frequency, it may be desirable for the amplification to decrease as the frequency components decrease in frequency from the peak low frequency down to the low end frequency.

It is further contemplated with regard to the second embodiment of the present invention that instead of each being a single frequency, it may be desirable for the peak high frequency, the peak low frequency or both to be a relatively narrow range of frequencies such that frequency components falling within each narrow range have generally the same amplitude.

The peak high frequency may be in the range of from about 6 KHz to about 30 KHz. Amplification of the frequency component(s) at the peak high frequency may be from about 1.5 times to about 3.0 times the amplification of a first intermediate frequency. The peak low frequency may be in the range of from about 20 Hz to about 1 KHz. Amplification of the frequency component(s) at the peak low frequency may be from about 1.25 times to about 2.0 times the amplification of a second intermediate frequency.

It is further contemplated with regard to the first and second embodiments of the present invention that one or more of the transformers 10, 100 and 200 may be tapped. Tapping may occur during the winding of any one of the first and second primary winding portions and the first and second secondary winding portions. After a predetermined number of turns of a winding portion have been wound about the bobbin but before the final number of turns have been formed, the wire being wound may be connected to another of the pins on the bobbin. In the illustrated embodiment, the first transformer is tapped. After the third wire 150 is randomly wound 400 times about the second film layer 153, it is wrapped or otherwise connected to pin P₅. Thereafter, the wire 150 is wound another 100 times and connected to pin P₆. If wire 301 is connected to pin P₅, the effective second primary winding portion 140b comprises 400 turns. Alternatively, if the wire 301 is connected to pin P₆, the effective second primary winding portion 140b comprises 500 turns. By changing the connection of the wire 301 from pin P₅ to pin P₆, the enhancement of the audio signal passing through the passive circuit 300 is changed.

An enhanced audio signal, according to the present invention, exhibits an improved harmonic quality compared to that of the original input audio signal. Additional advantages and modifications will readily appear to those skilled in the art. For instance, it may be desirable for two or more of the above described passive circuits, i.e., either two or more of the first passive circuits 5, two or more of the second passive circuits 300, or a combination of the two passive circuits 5 and 300, to be used in series.

Furthermore, when electronic audio signals from a compact disc of music and vocals were transmitted through the circuits of the present invention and the resulting enhanced electronic audio signals re-recorded onto a cassette tape using a consumer cassette player/recorder, the sound quality of the music and vocals produced from the recorded cassette tape was perceptibly better than the same music and vocals produced directly from the compact disc. This occurred even though the compact disc format is widely recognized as producing superior sound quality compared to the cassette tape format.

It is believed that the present invention can be used to enhance electronic audio signals from sound converting equipment, for example a hearing aid, a microphone or the like, before

being either recorded onto a recording medium (for example, magnetic tape or optical disk) or converted directly into acoustic sound or other sound impulses. It is also believed that an audio signal enhanced according to the present invention can be transmitted through the air or some other medium, for example, for television, radio, sonar, computer or cellular telephone use; can be transmitted through transmission lines, for example, for telephone, cable TV or computer use; can be converted directly into audible sound, for example, for use at a concert, a play, in a restaurant, or a bar; and that it can be used in any other application which includes an audio signal such as, for example, in distinguishing sonar images, etc.

It is further contemplated that the passive circuit may comprise a single transformer for non-linearly amplifying frequency components of an input audio signal such that the amplification of the frequency components in the input audio signal is increased as the frequency components decrease in frequency from an intermediate frequency e.g., about 3.5 KHz down to a peak low frequency. It is believed that amplification of frequency components from about 3.5 KHz to about 20 KHz may be unity gain (1.0), less than 1.0 or greater than 1.0. It is also believed that amplification of the frequency component at the peak low frequency may be about 1.25 times to about 2.0 times the amplification of an intermediate frequency component or the average amplification of a range of intermediate frequency components falling within the band of frequencies of 3.5 KHz to 20 KHz.

The present invention in its broader aspects is therefore not limited to the specific details, representative apparatus and method, and illustrative examples shown and described herein. Departures may be made from such details without departing from the spirit or scope of the general inventive concept of the present invention. Therefore, the scope of the invention should be limited only by the following claims and equivalents thereof.

What is claimed is:

TRD 009 PA

1. An apparatus for enhancing the quality of an input audio signal made up of frequency components within a band of frequencies having a low end and a high end, said apparatus comprising:

5 a passive circuit which distorts the input signal, when transmitted therethrough, into an enhanced audio signal by amplifying frequency components of the input audio signal, the amplification of the frequency components in the input audio signal increases as the frequency components increase in frequency from a first intermediate frequency up to a peak high frequency, wherein the enhanced audio signal exhibits an improved harmonic quality compared to that of the input audio signal.

2. The apparatus as set forth in claim 1, wherein said peak high frequency is in the range of from about 6 KHz to about 30 KHz.

3. The apparatus as set forth in claim 1, wherein the amplification of the frequency component at the peak high frequency is from about 1.5 times to about 3.0 times the amplification of said intermediate frequency.

4. The apparatus as set forth in claim 1, wherein said passive circuit further distorts the input signal such that the amplification of the frequency components in the input audio signal increases as the frequency components decrease in frequency from a second intermediate frequency down to a peak low frequency, wherein the enhanced audio signal exhibits more of an improved
5 harmonic quality compared to that of the input audio signal.

5. The apparatus as set forth in claim 4, wherein the peak low frequency is in the range of from about 20 Hz to about 1.0 KHz.

6. The apparatus as set forth in claim 4, wherein the amplitude of the frequency component at the peak low frequency is from about 1.25 times to about 2.0 times the amplification of said second intermediate frequency.

7. The apparatus of claim 4, wherein said first and second intermediate frequencies are the same frequency.

8. The apparatus as set forth in claim 1, wherein said passive circuit comprises at least one transformer.

9. The apparatus as set forth in claim 8, wherein said at least one transformer comprises a single transformer, said single transformer effecting amplitude distortion of said input signal as defined by a first portion of a frequency response curve, said first portion increasing non-linearly from said intermediate frequency up to a peak high frequency.

10. The apparatus as set forth in claim 8, wherein said at least one transformer comprises first and second transformers, said first and second transformers effecting amplitude distortion of said input signal as defined by a first portion of a frequency response curve, said first portion increasing non-linearly from said first intermediate frequency up to a peak high frequency, and effecting further amplitude distortion of said input signal as defined by a second portion of said frequency response curve, said second portion increasing non-linearly from a second intermediate frequency down to a peak low frequency.

11. The apparatus as set forth in claim 10, wherein said first and second intermediate frequencies are the same frequency.

12. An audio system comprising:

an audio source for generating an input audio signal made up of frequency components within a band of frequencies having a high end and a low end;

an audio amplifier for generating a speaker drive signal; and

5 a passive circuit for coupling said input audio signal to said audio amplifier, said passive circuit distorting said input audio signal, when transmitted therethrough, into an enhanced audio signal by amplifying frequency components of said input audio signal such that the frequency components in the input audio signal increase in amplitude as the frequency components increase in frequency from an intermediate frequency up to a peak high frequency, wherein the enhanced
10 audio signal exhibits an improved harmonic quality compared to that of the input audio signal.

13. An audio system as set forth in claim 12, wherein no active element is coupled between said audio source and said audio amplifier.

14. The apparatus as set forth in claim 12, wherein said passive circuit further distorts the input signal such that the frequency components in the input audio signal increase in amplitude as the frequency components decrease in frequency from an intermediate frequency down to a peak low frequency, wherein the enhanced audio signal exhibits more of an improved harmonic
5 quality compared to that of the input audio signal.

15. The apparatus as set forth in claim 12, wherein said passive circuit comprises at least one transformer.

16. The apparatus as set forth in claim 15, wherein said at least one transformer comprises a single transformer, said single transformer effecting amplitude distortion of said input signal as defined by a first portion of a frequency response curve, said first portion increasing non-linearly from an intermediate frequency to a peak high frequency.

17. The apparatus as set forth in claim 15, wherein said at least one transformer comprises first and second transformers, said first and second transformers effecting amplitude distortion of said input signal as defined by a first portion of a frequency response curve, said first portion increasing non-linearly from an intermediate frequency up to a peak high frequency, and
5 effecting further amplitude distortion of said input signal as defined by a second portion of said frequency response curve, said second portion increasing non-linearly from said intermediate frequency down to a peak low frequency.

18. A method of enhancing the quality of electronic audio signals, comprising the steps of:
providing an input audio signal made up of frequency components within a frequency band having a high end and a low end; and

distorting the input audio signal into an enhanced audio signal by passing said input audio
5 signal through a passive circuit to amplify frequency components of the input signal, the amplification of the frequency components in the input audio signal increases as the frequency components increase in frequency from an intermediate frequency up to a peak high peak frequency, wherein the enhanced audio signal exhibits an improved harmonic quality compared to that of the input audio signal.

19. The method as set forth in claim 18, wherein said step of distorting also includes further
distorting the input signal such that the amplification of the frequency components in the input audio signal increases as the frequency components decrease in frequency from an intermediate frequency down to a peak low frequency, wherein the enhanced audio signal exhibits more of an
5 improved harmonic quality compared to that of the input audio signal.

20. The method as recited in claim 18, further comprising the step of transmitting the enhanced audio signal from one location to another.

TRD 009 PA

21. The method as recited in claim 18, further comprising the step of processing the enhanced audio signal into sound.
22. The method as recited in claim 18, further comprising the step of recording the enhanced audio signal onto a recording medium.
23. A recording medium having at least one enhanced audio signal recorded thereon by the method of claim 18.

ABSTRACT

The present invention is a method and apparatus for simply and inexpensively enhancing an electronic audio signal in such a way that the quality of audible sound produced from the audio signal more closely approaches that of the original sound heard live in an acoustically designed environment. The present invention restores the perception of harmonics that are normally missing in an electronic audio signal. The apparatus comprises a passive circuit that causes an input audio signal to be distorted such that an enhanced audio signal is produced that exhibits an improved harmonic quality compared to that of the original input audio signal. The passive circuit comprises at least one transformer.

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the invention entitled:

APPARATUS AND METHODS FOR ENHANCING ELECTRONIC AUDIO SIGNALS

(Docket TRD 009 PA), described and claimed

 X in the attached specification;
 in the specification filed _____,
as U.S. Application Serial No. _____, and as
amended _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as filed and as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a).


I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Richard A. Killworth	Reg. No. 25,397
James F. Gottman	Reg. No. 27,262
Timothy W. Hagan	Reg. No. 29,001
Richard C. Stevens	Reg. No. 28,046
Robert L. Showalter	Reg. No. 33,579
Susan M. Luna	Reg. No. 38,769
James E. Beyer	Reg. No. 39,564
Bradley A. Keller	Reg. No. 37,654
Charlotte L. Barney	Reg. No. 35,060
Stephen A. Calogero	Reg. No. P-41,491

Address all telephone calls to (937) 223-2050. Address all correspondence to: KILLWORTH, GOTTMAN, HAGAN & SCHAEFF, L.L.P., One Dayton Centre, One South Main Street, Suite 500, Dayton, Ohio 45402-2023.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of sole or first Inventor: Arturo J. Garcia

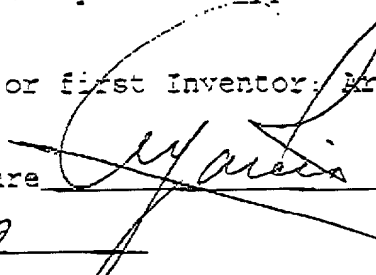Inventor's signature 


Date: 12-12-97

Residence: 25323 S.W. 127 Place, Miami, Florida 33032

Citizenship: USA

Post Office Address: c/o True Dimensional Sound, Inc.
1450 Madruga Ave., Suite #404
Coral Gables, Florida 33146

Full name of second Inventor: Arturo H. Garcia

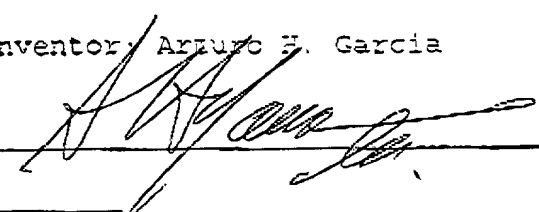Inventor's signature 

Date: 12/12/97

Residence: 4443 S.W. 11th Street, Miami, Florida 33134

Citizenship: USA

Post Office Address: c/o True Dimensional Sound, Inc.
1450 Madruga Ave., Suite #404
Coral Gables, Florida 33146

0398933-121397

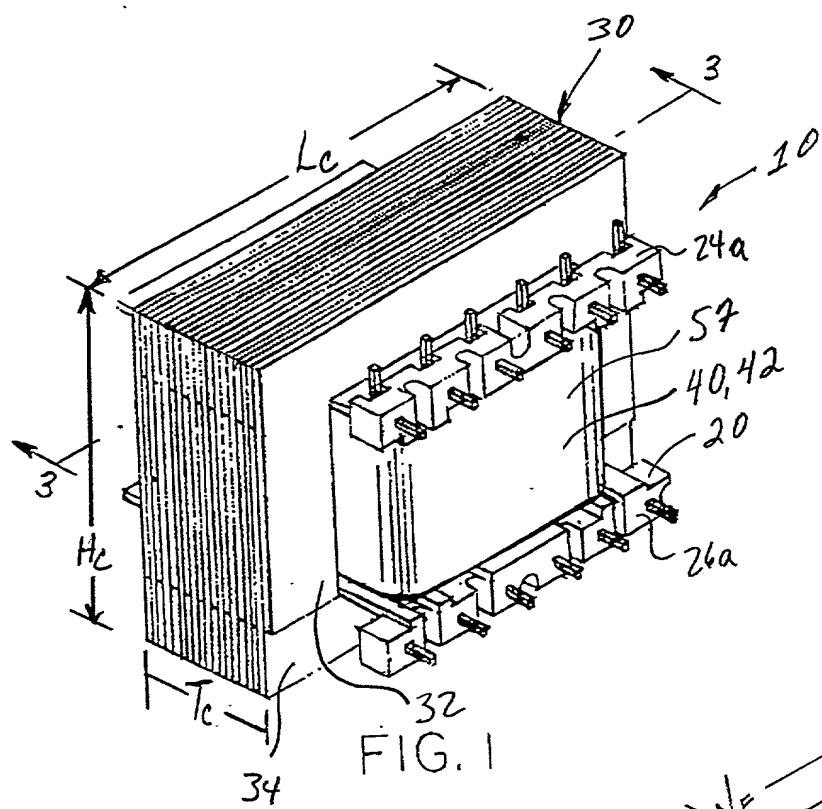


FIG. 1

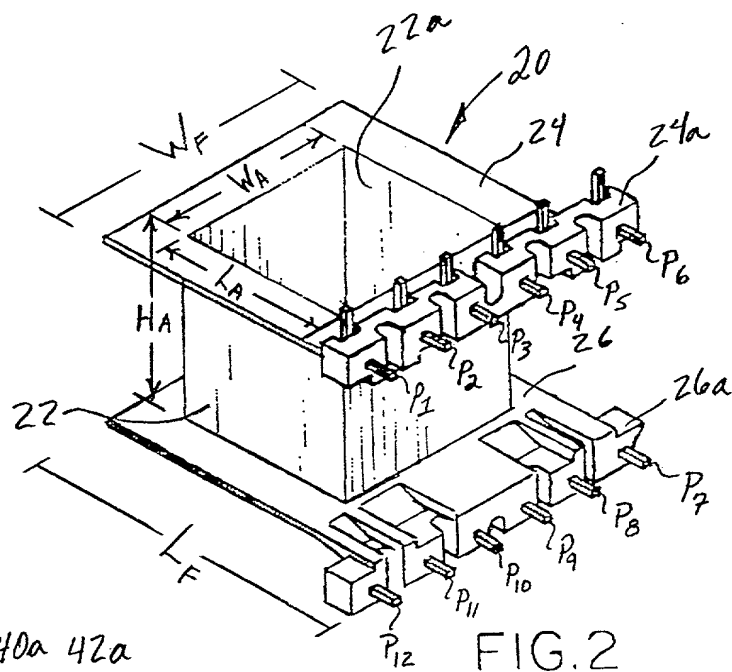
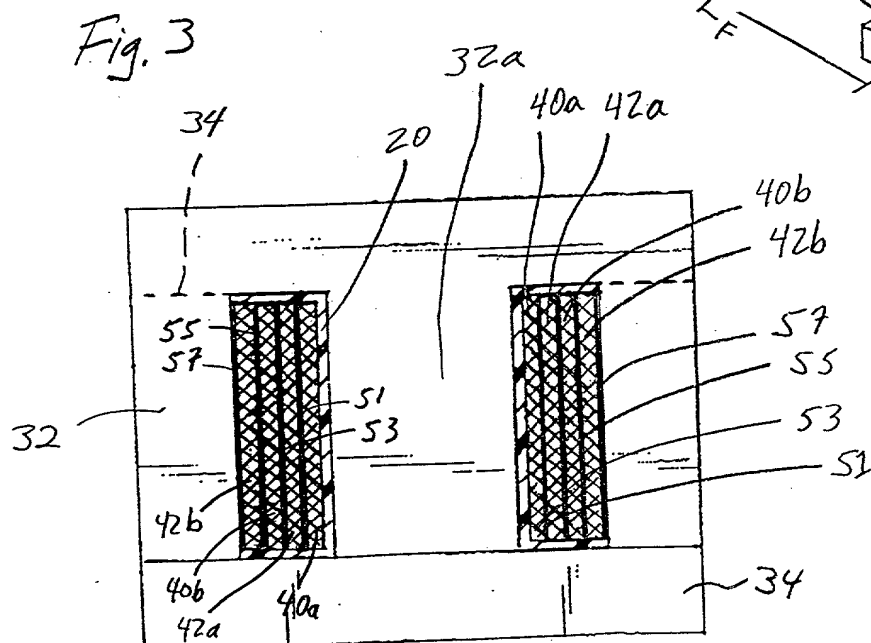


FIG. 2



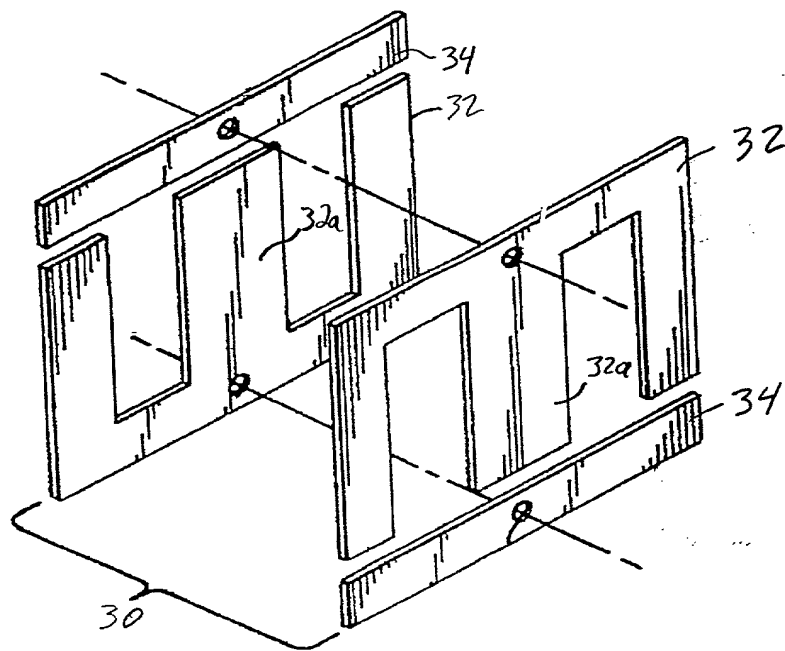


Fig. 6

Amplitude
Voltage
(V) 51

Fig. 7

100 K Ω LOAD

50 K Ω LOAD

20 K Ω LOAD

C3

C2

C1

(Hz)

25K

20K

15K

10K

5K

1K

500

250


100






4V




3V




2V


1V

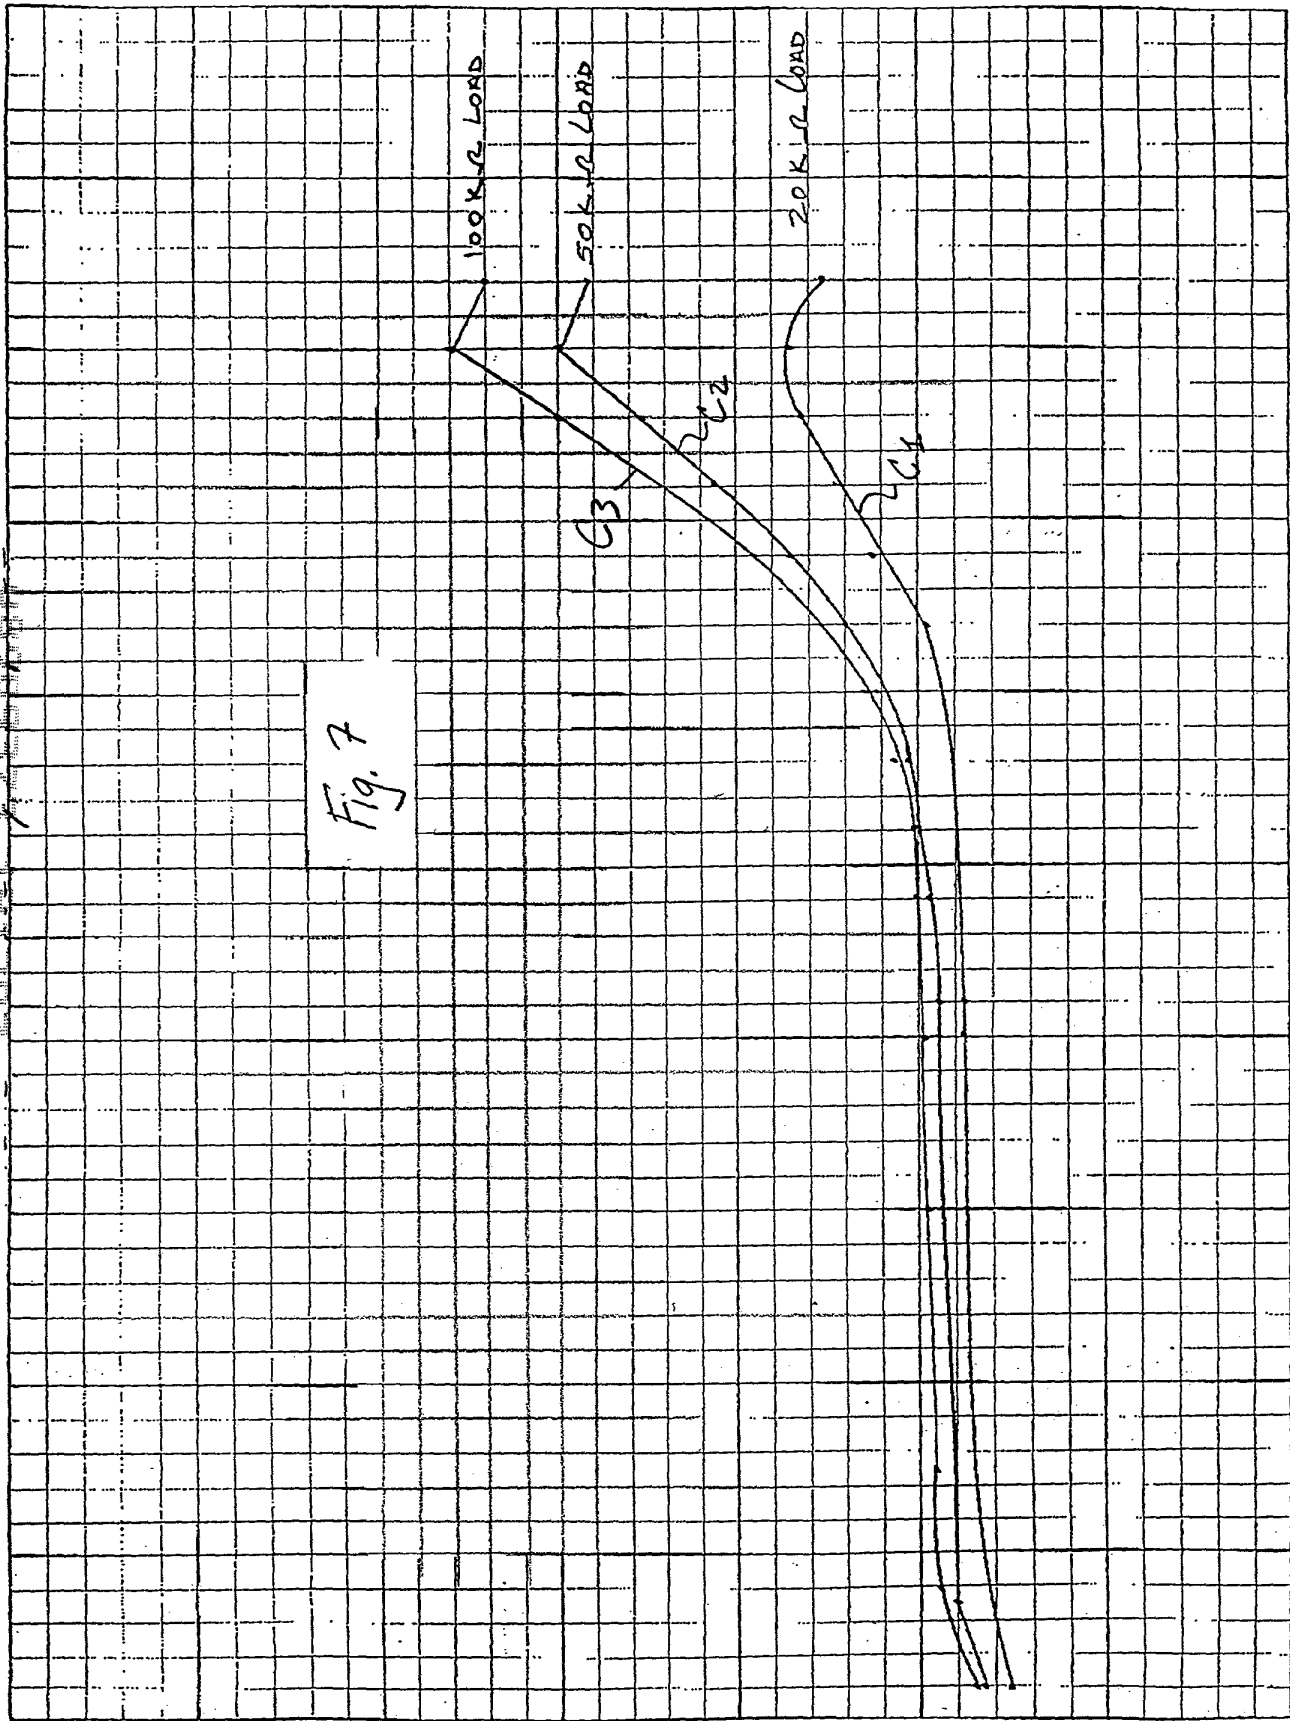

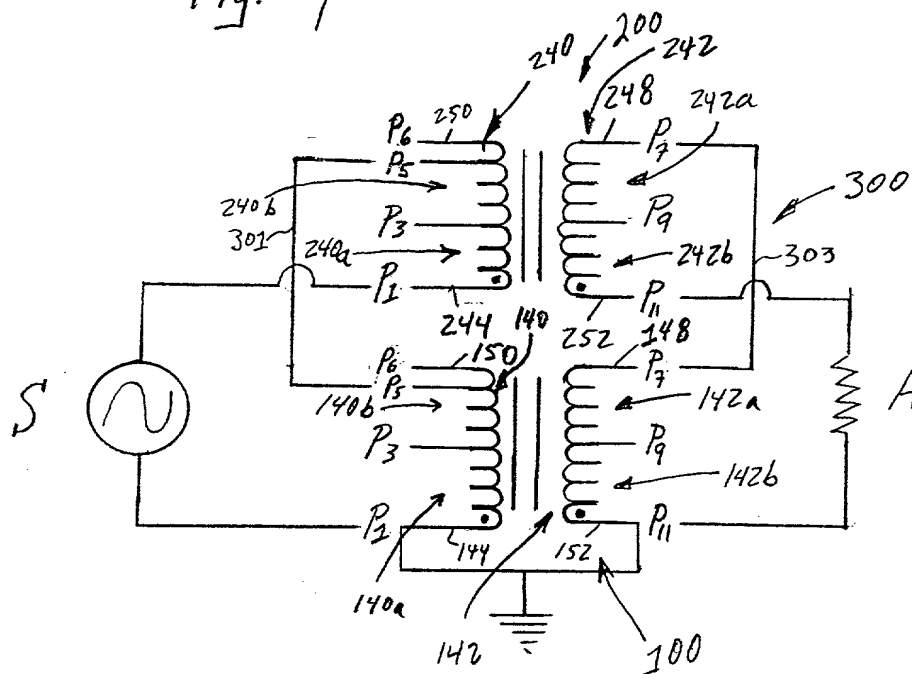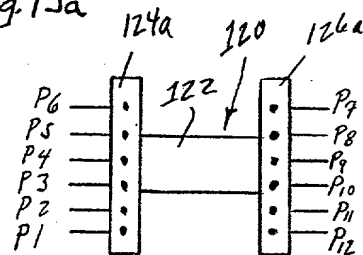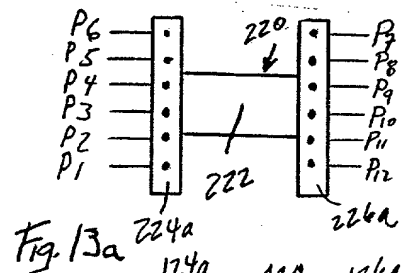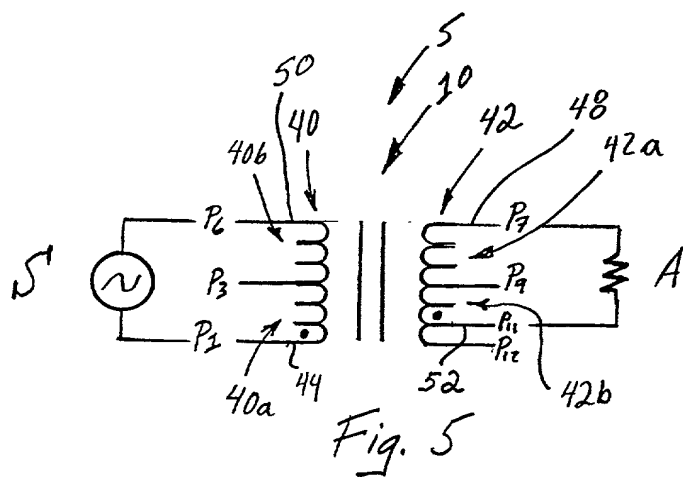

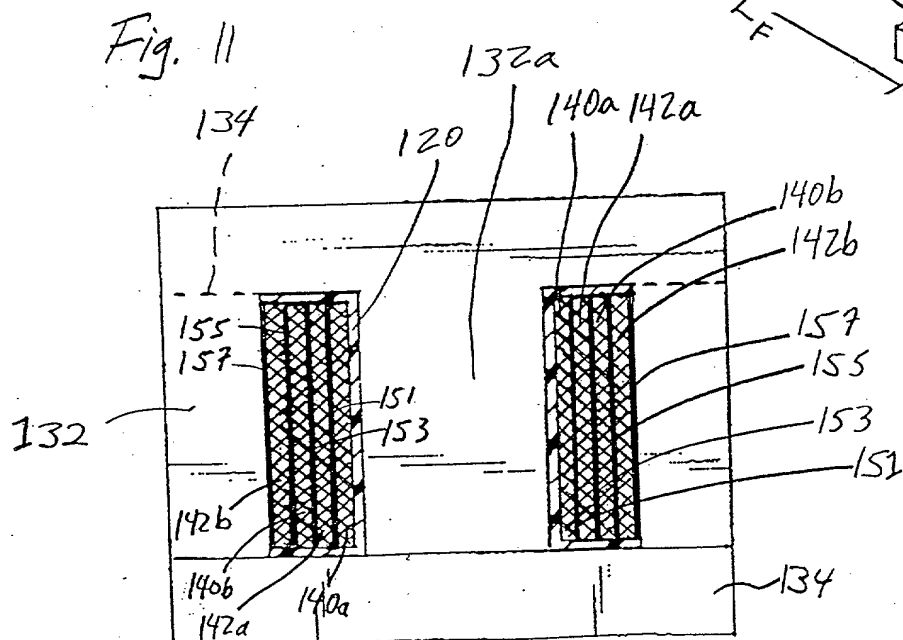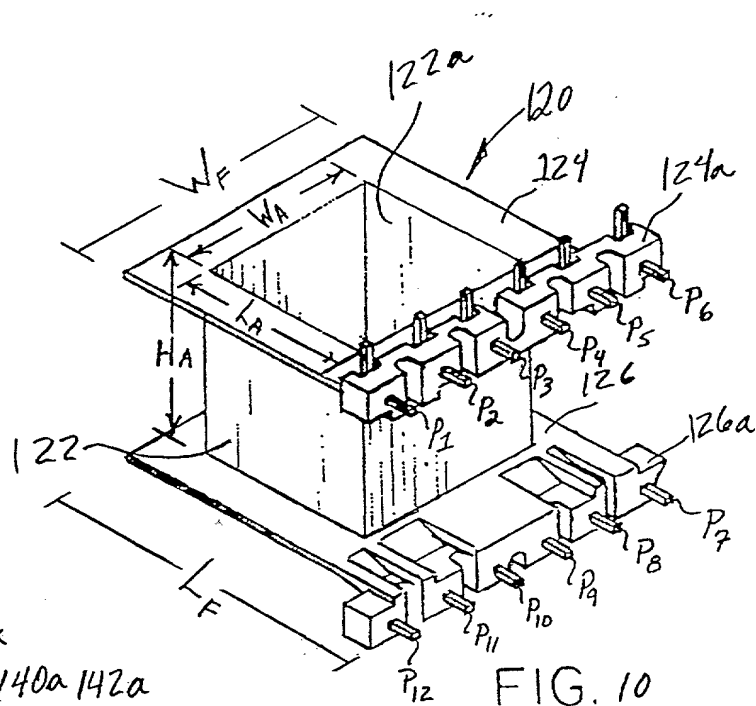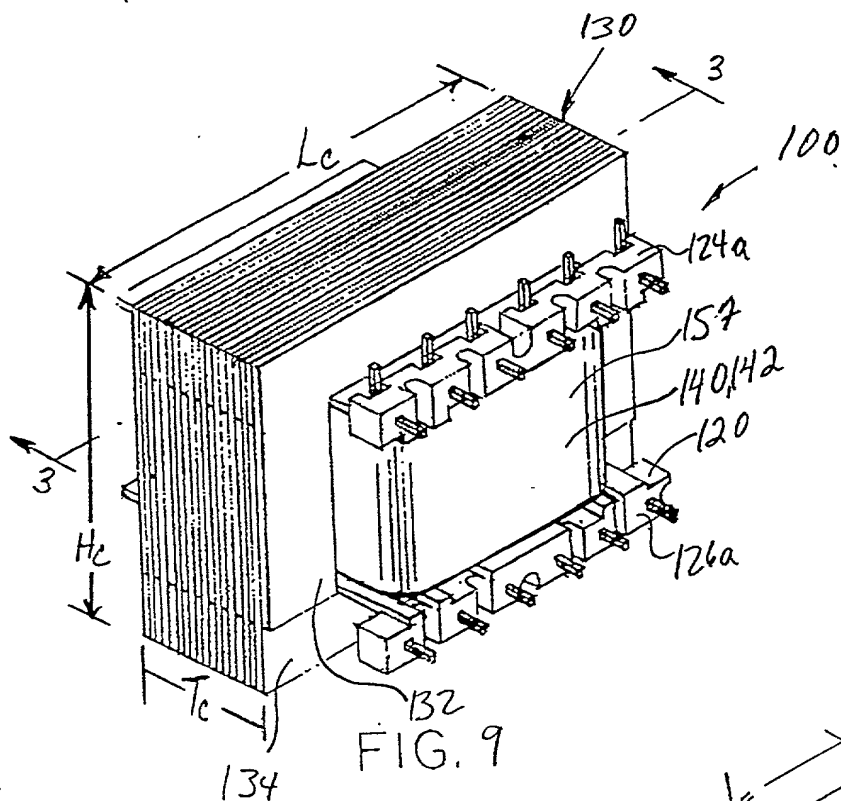

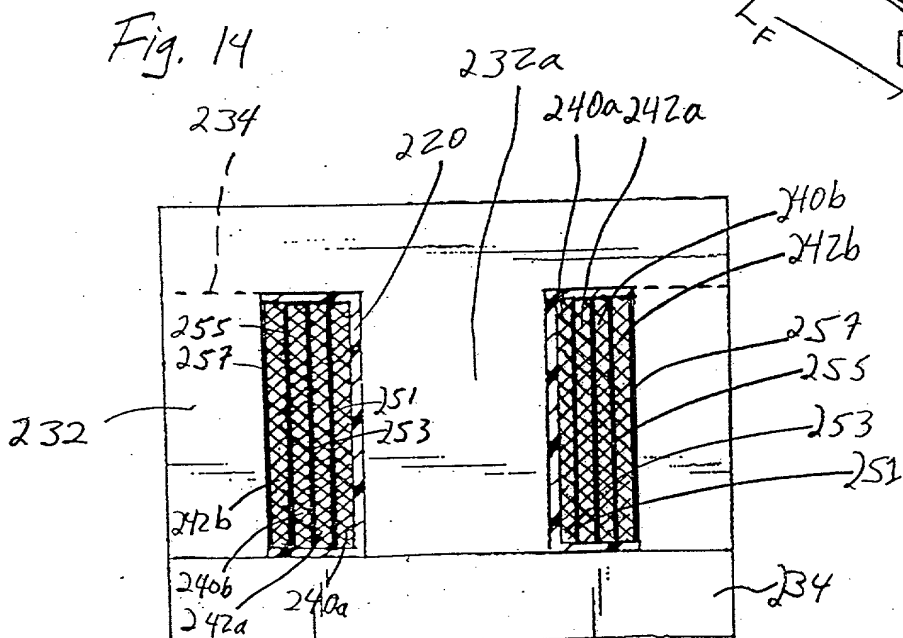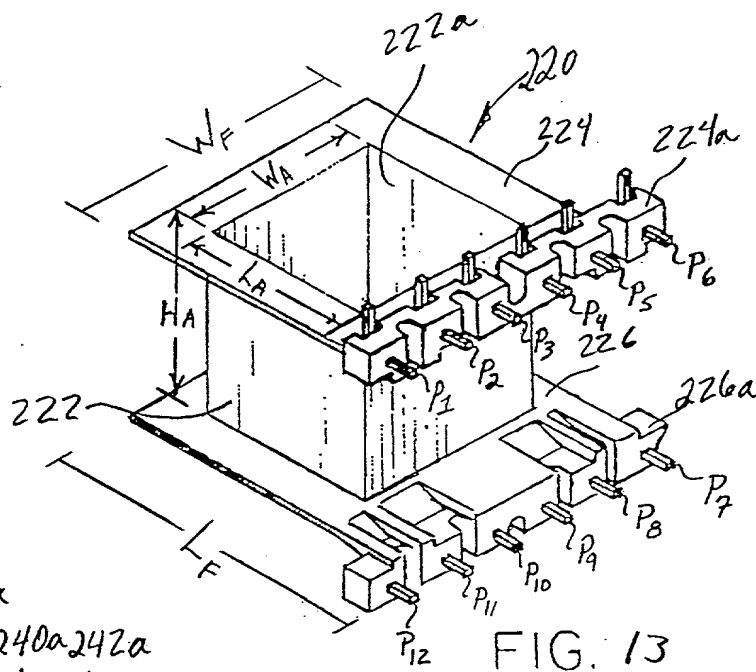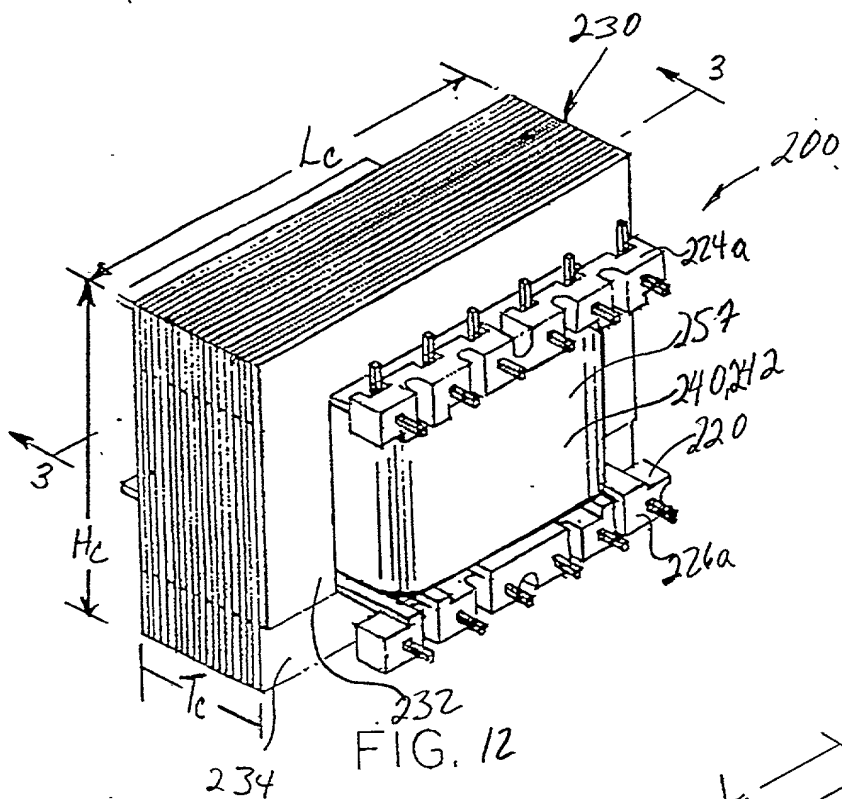

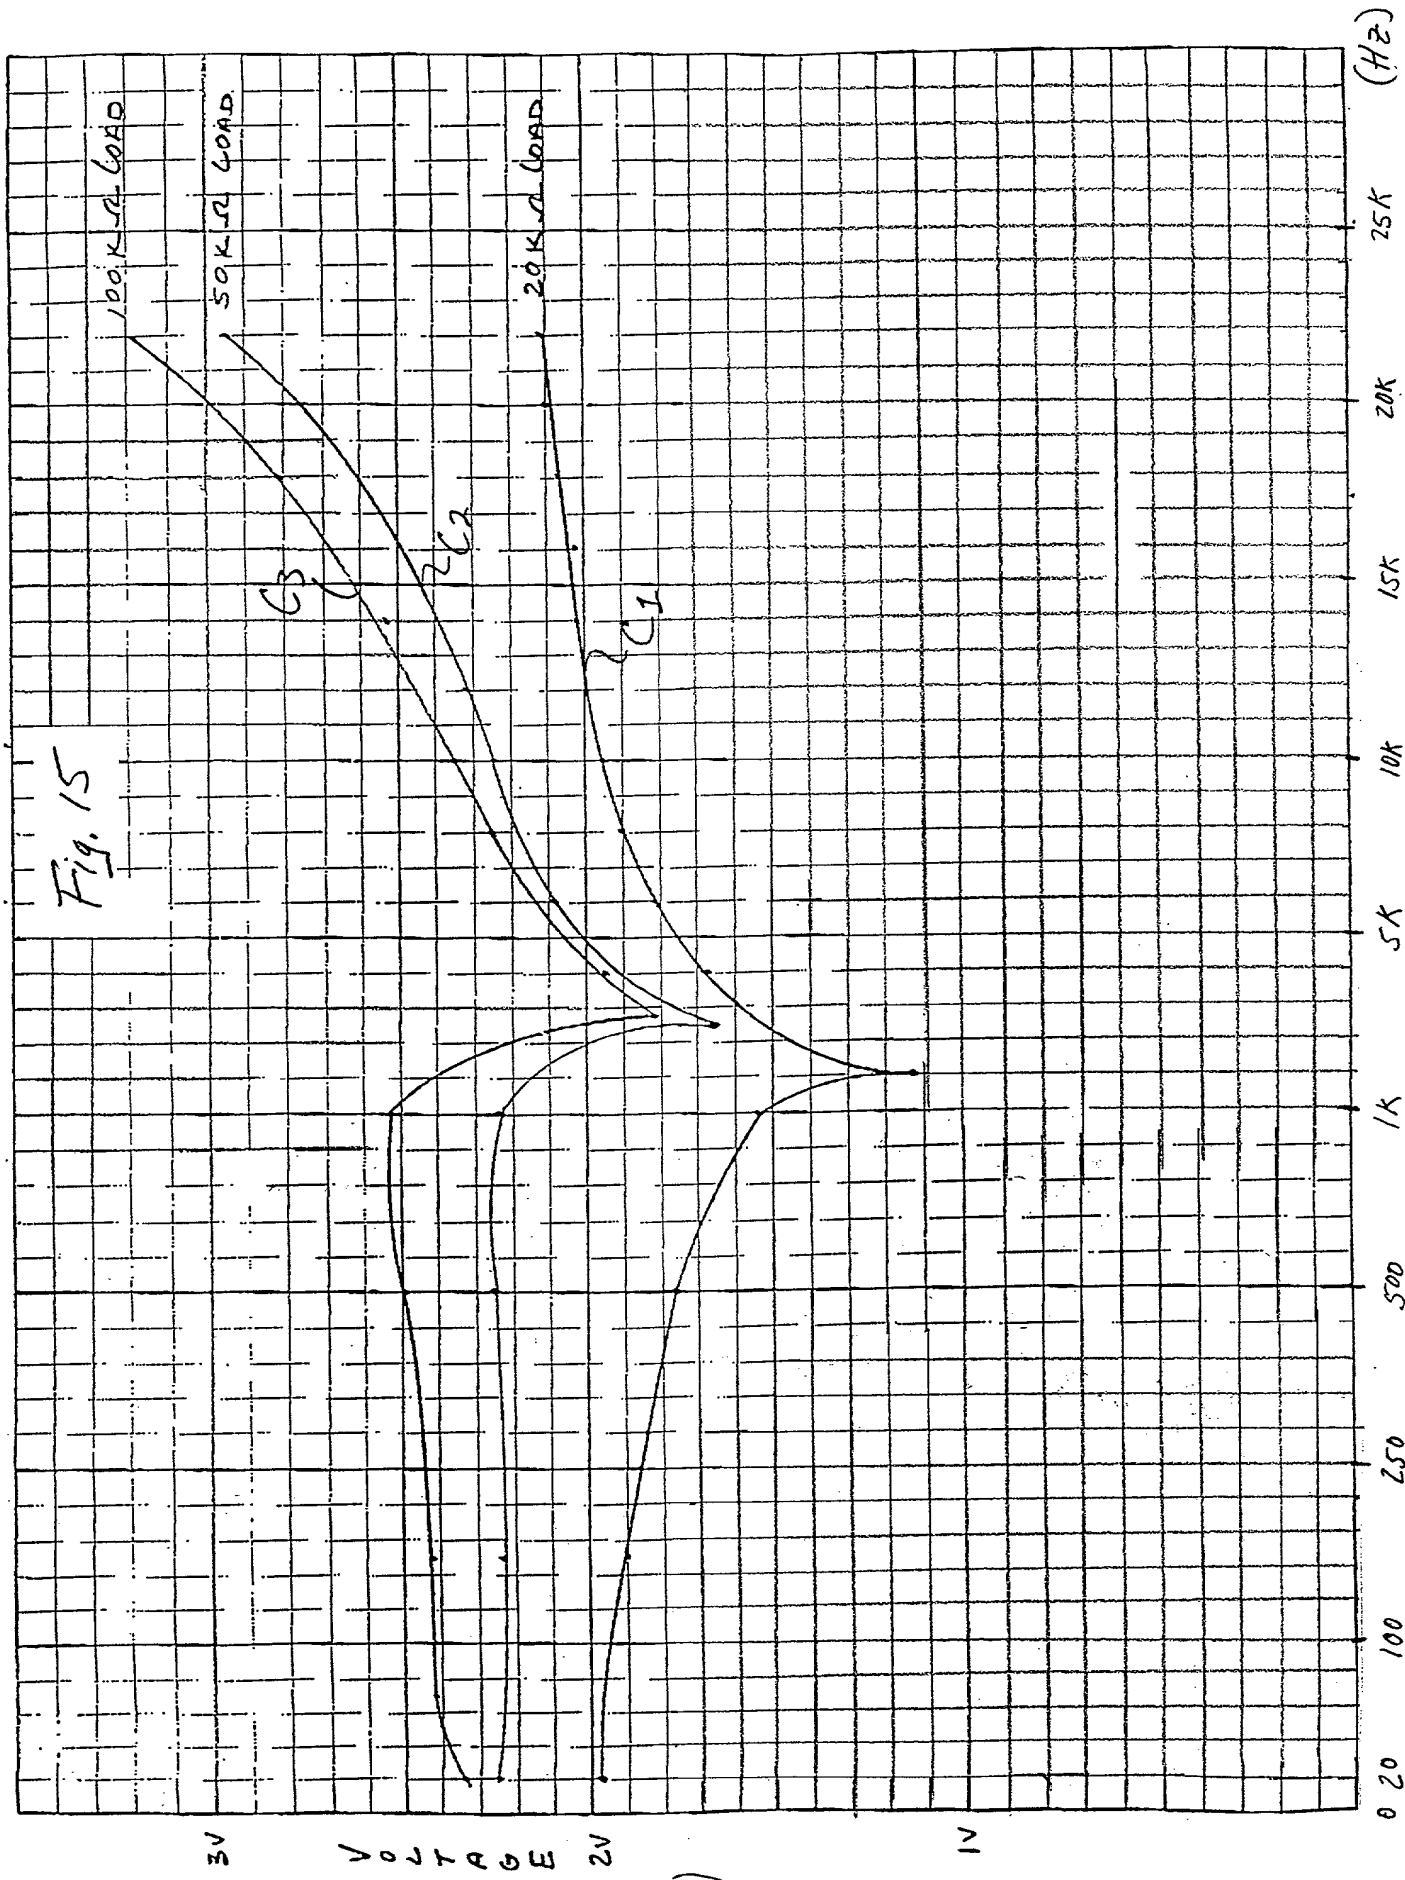

Applicant or Patentee: Arturo J. Garcia, et al. Att.Dkt.No. TRD 009 PA
Serial or Patent No.: _____
Filed or Issued: _____
For: APPARATUS AND METHODS FOR ENHANCING ELECTRONIC AUDIO SIGNALS

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(c)) - SMALL BUSINESS CONCERN

I declare that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act
on behalf of the concern identified below:

NAME OF CONCERN True Dimensional Sound, Inc.
ADDRESS OF CONCERN 1450 Madruga Avenue, Suite 404
Coral Gables, Florida 33146

06999373-161297
I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with respect to the invention, entitled APPARATUS AND METHODS FOR ENHANCING ELECTRONIC AUDIO SIGNALS by inventor(s) Arturo J. Garcia and Arturo H. Garcia described in

- ☒ the specification filed herewith
☐ application serial no. _____, filed _____
☐ patent no. _____, issued _____

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e). *NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

ADDRESS

NAME.

ADDRESS

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

TITLE OF PERSON OTHER THAN OWNER Secretary

ADDRESS OF PERSON SIGNING 1450 Madruga Ave., Suite 404, Coral Gables, FL 33146

SIGNATURE.

DATE _____

12/12/97

[illegible]